

# **NORTHVILLE DOWNS TRAFFIC IMPACT STUDY**

**NORTHVILLE, MICHIGAN**

**DECEMBER 14, 2021**



**PREPARED BY:**




**27725 STANSBURY BLVD., SUITE 195  
FARMINGTON HILLS, MI 48334**

F&V JN 852320  
© December 2021

### Notice and Disclaimer

This document is provided by Fleis & VandenBrink Engineering, Inc. for informational purposes only. No changes or revisions may be made to the information presented in the document without the express consent of Fleis & VandenBrink Engineering, Inc. The information contained in this document is as accurate and complete as reasonably possible. Should you find any errors or inconsistencies, we would be grateful if you could bring them to our attention.

The opinions, findings, and conclusions expressed herein are those of Fleis & VandenBrink Engineering, Inc. and do not necessarily reflect the official views or policy of the City of Northville or the Wayne County Department of Public Services, which makes no warranty, either implied or expressed, for the information contained in this document; neither does it assume legal liability or responsibility for the accuracy, completeness or usefulness of this information. Any products, manufacturers or trademarks referenced in this document are used solely for reference purposes.



I hereby certify that this engineering document was prepared by me or under my direct personal supervision and that I am a duly licensed Professional Engineer under the laws of the State of Michigan.

Agency Review	Date	Comments

## TABLE OF CONTENTS

<b>EXECUTIVE SUMMARY .....</b>	<b>1</b>
BACKGROUND DATA .....	2
TRIP GENERATION .....	2
SITE TRIP DISTRIBUTION .....	3
OPERATIONAL ANALYSIS SUMMARY .....	3
<b>1 INTRODUCTION .....</b>	<b>3</b>
<b>2 BACKGROUND DATA .....</b>	<b>4</b>
2.1 STUDY ROADWAY NETWORK .....	4
2.2 TRAFFIC VOLUME DATA .....	10
<b>3 EXISTING CONDITIONS ANALYSIS (2021) .....</b>	<b>11</b>
3.1 SCENARIO 1 - BASELINE OPERATIONS (PRE-COVID) .....	11
3.2 SCENARIO 2 – MAIN ST. & CENTER ST. CLOSED .....	12
3.3 SCENARIO 3 - MAIN ST. CLOSED ONLY .....	12
3.4 EXISTING CONDITIONS ANALYSIS SUMMARY .....	12
3.4.1 <i>Center Street and Randolph Street</i> .....	18
3.4.2 <i>Center Street and Cady Street</i> .....	18
3.4.3 <i>Northville Road (S. Main Street) and N. Seven Mile Road</i> .....	18
3.4.4 <i>Sheldon Avenue/Center Street and Seven Mile Road/Hines Drive</i> .....	19
<b>4 BACKGROUND CONDITIONS ANALYSIS (2028) .....</b>	<b>22</b>
4.1 SCENARIO 1 - BASELINE OPERATIONS (PRE-COVID) .....	22
4.2 SCENARIO 2 - MAIN ST. & CENTER ST. CLOSED .....	22
4.3 SCENARIO 3 - MAIN ST. CLOSED ONLY .....	22
4.4 BACKGROUND CONDITIONS ANALYSIS SUMMARY .....	23
<b>5 SITE TRIP GENERATION .....</b>	<b>30</b>
<b>6 SITE TRIP DISTRIBUTION .....</b>	<b>31</b>
<b>7 FUTURE CONDITIONS (2028) .....</b>	<b>32</b>
7.1 SCENARIO 1 - BASELINE OPERATIONS (PRE-COVID) .....	32
7.2 SCENARIO 2 - MAIN ST. & CENTER ST. CLOSED .....	32
7.3 SCENARIO 3 - MAIN ST. CLOSED ONLY .....	32
7.4 FUTURE CONDITIONS ANALYSIS SUMMARY .....	32
<b>8 CONCLUSIONS .....</b>	<b>41</b>
<b>9 RECOMMENDATIONS .....</b>	<b>42</b>

## LIST OF TABLES

TABLE E1: TRIP GENERATION SUMMARY .....	3
TABLE E2: ANALYSIS AND MITIGATION SUMMARY .....	4
TABLE 3.1: EXISTING CONDITIONS ANALYSIS SUMMARY .....	13
TABLE 3.2: EXISTING INTERSECTION MITIGATION SUMMARY .....	16
TABLE 3.3: EXISTING CONDITIONS WITH MITIGATION ANALYSIS SUMMARY .....	17
TABLE 3.4: SCENARIO 1- CENTER STREET AND SEVEN MILE ROAD INTERSECTION MITIGATION SUMMARY (EXISTING) .....	20
TABLE 3.5: SCENARIO 2- CENTER STREET AND SEVEN MILE ROAD INTERSECTION MITIGATION SUMMARY (EXISTING) .....	20
TABLE 3.6: SCENARIO 3- CENTER STREET AND SEVEN MILE ROAD INTERSECTION MITIGATION SUMMARY (EXISTING) .....	21
TABLE 4.1: BACKGROUND CONDITIONS ANALYSIS SUMMARY .....	23
TABLE 4.2: BACKGROUND INTERSECTION MITIGATION SUMMARY .....	26
TABLE 4.3: BACKGROUND CONDITIONS WITH MITIGATION ANALYSIS SUMMARY .....	27
TABLE 4.4: SCENARIO 1 - CENTER ST. AND SEVEN MILE RD. INTERSECTION MITIGATION SUMMARY (BACKGROUND) .....	28
TABLE 4.5: SCENARIO 2 - CENTER ST. AND SEVEN MILE RD. INTERSECTION MITIGATION SUMMARY (BACKGROUND) .....	28
TABLE 4.6: SCENARIO 3 - CENTER ST. AND SEVEN MILE RD. INTERSECTION MITIGATION SUMMARY (BACKGROUND) .....	29
TABLE 5.1: TRIP GENERATION SUMMARY .....	30
TABLE 6.1: SITE GENERATED TRAFFIC DISTRIBUTION .....	31
TABLE 7.1: FUTURE CONDITIONS ANALYSIS SUMMARY .....	32
TABLE 7.2: FUTURE INTERSECTION MITIGATION SUMMARY .....	37
TABLE 7.3: FUTURE CONDITIONS WITH MITIGATION ANALYSIS SUMMARY .....	38
TABLE 7.4: SCENARIO 1 - CENTER ST. AND SEVEN MILE RD. INTERSECTION MITIGATION SUMMARY (FUTURE) .....	39
TABLE 7.5: SCENARIO 2 - CENTER ST. AND SEVEN MILE RD. INTERSECTION MITIGATION SUMMARY (FUTURE) .....	39
TABLE 7.6: SCENARIO 3 - CENTER ST. AND SEVEN MILE RD. INTERSECTION MITIGATION SUMMARY (FUTURE) .....	40
TABLE 8.1: ANALYSIS AND MITIGATION SUMMARY .....	42

## LIST OF FIGURES

FIGURE E1: SITE LOCATION ..... 1

FIGURE E2: INTERSECTION MITIGATION SUMMARY ..... 5

FIGURE 1: SITE LOCATION ..... 3

FIGURE 9: INTERSECTION MITIGATION SUMMARY ..... 44

FIGURE 2.1: LANE USE AND TRAFFIC CONTROL ..... A

FIGURE 3.1: SCENARIO 1-EXISTING TRAFFIC VOLUMES ..... B

FIGURE 3.2: SCENARIO 2-EXISTING TRAFFIC VOLUMES ..... B

FIGURE 3.3: SCENARIO 3-EXISTING TRAFFIC VOLUMES ..... B

FIGURE 4.1: SCENARIO 1-BACKGROUND TRAFFIC VOLUMES ..... C

FIGURE 4.2: SCENARIO 2- BACKGROUND TRAFFIC VOLUMES ..... C

FIGURE 4.3: SCENARIO 3- BACKGROUND TRAFFIC VOLUMES ..... C

FIGURE 6.1: SCENARIO 1-SITE GENERATED TRAFFIC VOLUMES ..... D

FIGURE 6.2: SCENARIO 2- SITE GENERATED TRAFFIC VOLUMES ..... D

FIGURE 6.3: SCENARIO 3- SITE GENERATED TRAFFIC VOLUMES ..... D

FIGURE 7.1: SCENARIO 1-BACKGROUND TRAFFIC VOLUMES ..... D

## LIST OF APPENDICES

- A. BACKGROUND INFORMATION
- B. EXISTING TRAFFIC CONDITIONS
- C. BACKGROUND (2028) TRAFFIC CONDITIONS
- D. FUTURE TRAFFIC CONDITIONS

## REFERENCES

AMERICAN ASSOCIATION OF STATE HIGHWAY AND TRANSPORTATION OFFICIALS (AASHTO). (2018). *A POLICY ON GEOMETRIC DESIGN OF HIGHWAYS AND STREETS*. WASHINGTON DC.

FEDERAL HIGHWAY ADMINISTRATION, MICHIGAN DEPARTMENT OF TRANSPORTATION, MICHIGAN STATE POLICE. (2011). *MICHIGAN MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES*.

INSTITUTE OF TRANSPORTATION ENGINEERS. (2021). *TRIP GENERATION MANUAL, 11TH EDITION*. WASHINGTON DC.

NATIONAL RESEARCH COUNCIL (U.S.) TRANSPORTATION RESEARCH BOARD. (2000). *HIGHWAY CAPACITY MANUAL, 4TH EDITION (HCM 2000)*. WASHINGTON, D.C.: TRANSPORTATION RESEARCH BOARD.

NATIONAL RESEARCH COUNCIL (U.S.) TRANSPORTATION RESEARCH BOARD. (2016). *HIGHWAY CAPACITY MANUAL, 6TH EDITION (HCM6)*. WASHINGTON, D.C.: TRANSPORTATION RESEARCH BOARD.

PAPACOSTAS, & PREVEDOUROS. (2001). *TRANSPORTATION ENGINEERING AND PLANNING*.

STOVER, V. G., & KOEPKE, F. J. (2006). *TRANSPORTATION AND LAND DEVELOPMENT (VOL. 2ND EDITION)*. WASHINGTON DC: INSTITUTE OF TRANSPORTATION ENGINEERS (ITE).


**EXECUTIVE SUMMARY**

This report presents the results of a Traffic Impact Study (TIS) for the proposed development in the City of Northville, Michigan. The project site is located generally in the northeast quadrant of the Center Street and Hines Drive/Seven Mile Road intersection on the property that is currently occupied by Northville Downs, as shown on **Figure E1**. The proposed development includes the construction of mixed-use, with various residential unit types and commercial. The development includes site access to Cady Street, Griswold Street, Beal Street, Fairbrook Street, and Center Street.

**FIGURE E1: SITE LOCATION**



The scope of this study was developed based on Fleis & VandenBrink’s (F&V) knowledge of the study area, understanding of the development program, accepted traffic engineering practice and information published by the Institute of Transportation Engineers (ITE). In addition, the City of Northville and their traffic engineering consultant OHM and planning consultant Carlisle Wortman provided input regarding the scope of work included herein. The study includes the evaluation of three (3) scenarios which are summarized below




**Scenario 1 Baseline Operations (Pre-COVID)**

- Pre-COVID 2018 traffic volumes grown to 2021
- Pre-COVID traffic operations



**Scenario 2 Main St. & Center St. Closed**

- 2021 Existing Traffic Volumes Collected
- COVID Impacts and Road Closures



**Scenario 3 Main St. Closed Only**

- 2021 Existing Traffic Volumes, adjusted to account for Center Street open
- COVID Impacts and Road Closure



## BACKGROUND DATA

- Traffic volume data was collected at the study intersections by F&V subconsultants Traffic Data Collection Inc. (TDC) on May 15, 2018, and October 18, 2018, and by Gewalt Hamilton Associates, Inc (GHA) on October 19, 2021, during the weekday AM (7:00 AM-9:00 AM) and PM (4:00 PM-6:00 PM) peak periods.
- The analysis includes the evaluation of 28 off-site intersections in the City of Northville adjacent to the project site and six (6) new site driveway intersections for a total of 34 study intersection.
- An annual 0.2% background growth was determined from SEMCOG data to calculate the projected implicit background traffic growth to the site buildout year in 2028.
- In addition to background growth, the following developments were identified by the City of Northville to include as background traffic: Cady Project – 6-unit condominium (South side of Cady Street, east of Center Street), 355 E. Cady St. - 3-story mixed-use building; first floor Retail, office above, 455 E. Cady St “Hanger Building”- office space, and Foundry Flask – 78 Multi-Family Units, corner store specialty market.

## TRIP GENERATION

The proposed development includes single family, attached housing, multi-family units and commercial uses. The following ITE Trip Generation Manual land uses were determined to be the best fit for the proposed development.

### Single-Family Detached Housing (LUC 210)

- A single-family detached housing site includes any single-family detached home on an individual lot.

### Single-Family Attached Housing (LUC 215)

- Single-family attached housing includes any single-family housing unit that shares a wall with an adjoining dwelling unit, whether the walls are for living space, a vehicle garage, or storage space. Includes duplexes and townhouses/rowhouses, joined side-by-side in a row and each with an outside entrance.

### Mid-Rise Multi-Family Home (LUC 221)

- Mid-rise multifamily housing includes apartments and condominiums located in a building that has between four and 10 floors of living space. Access to individual dwelling units is through an outside building entrance, a lobby, elevator, and a set of hallways.

### Strip Retail Plaza <40k SF (LUC 822)

- A strip retail plaza is an integrated group of commercial establishments that is planned, developed, owned, and managed as a unit. Each study site in this land use has less than 40,000 square feet of gross leasable area (GLA).

The number of AM and PM peak hour vehicle trips that would be generated by the proposed development was forecast based on data published by ITE in the *Trip Generation Manual, 11<sup>th</sup> Edition*.

**Table E1: Trip Generation Summary**

Land Use	ITE Code	Amount	Units	Average Daily Traffic (vpd)	AM Peak Hour (vph)			PM Peak Hour (vph)		
					In	Out	Total	In	Out	Total
Single-Family Detached Housing	210	39	DU	424	8	24	32	26	15	41
Single-Family Attached Housing	215	259	DU	1,923	40	89	129	86	65	151
Multi-Family Home (Mid-Rise)	221	174	DU	784	15	50	65	41	27	68
Total Trips				3,131	63	163	226	153	107	260
<i>Internal Capture</i>				190	1	2	3	14	5	19
<b>New Trips</b>				<b>2,941</b>	<b>62</b>	<b>161</b>	<b>223</b>	<b>139</b>	<b>102</b>	<b>241</b>
Strip Retail Plaza (<40k SF)	822	17,374	SF	963	25	16	41	58	57	115
<i>Internal Capture</i>				190	2	1	3	5	14	19
<i>Pass-By (34%)</i>				327	8	5	13	16	16	32
<b>New Trips</b>				<b>446</b>	<b>15</b>	<b>10</b>	<b>25</b>	<b>37</b>	<b>27</b>	<b>64</b>
Total Trips				4,094	88	179	267	211	164	375
<i>Total Internal Capture</i>				380	3	3	6	19	19	38
<i>Total Pass-By</i>				327	8	5	13	16	16	32
<b>Total New Trips</b>				<b>3,387</b>	<b>77</b>	<b>171</b>	<b>248</b>	<b>176</b>	<b>129</b>	<b>305</b>

**SITE TRIP DISTRIBUTION**

- The vehicular trips that would be generated by the proposed development were assigned to the study roads based on existing peak hour traffic patterns in the adjacent roadway network and the methodologies published by ITE.
- The global trip generation is based on trips in the AM going from the residential development exiting the study network and returning to the study network in the PM. The vehicular traffic volumes were distributed to the roadway network according to the global traffic distribution.
- The proposed development plan has multiple site access points to the adjacent roadway network; therefore, the impact of the development is dispersed throughout the area study intersections. Additionally, the trips were routed to the roadway network based on the available roadway connectively associated with each of the roadway scenarios.

**OPERATIONAL ANALYSIS SUMMARY**

- All of the study intersections generally operate well with all Scenarios, with a few exceptions as noted below.
- The recommended improvements identified for existing and background conditions were found to mitigate the future intersection delays at the study intersections with the additional of the site generated traffic volumes.
- The additional delays and mitigation measures noted for Background conditions are highlighted in green and additional delays from Future conditions are highlighted below in blue. No mitigation measures are recommended.
- No additional mitigation measures were identified with the additional site generated traffic in the Future conditions.
- The mitigations are generally the same across all evaluation scenarios. The operations and recommendations are summarized in **Table E.2** and shown on **Figure E.2**



**Table E2: Analysis and Mitigation Summary**

Intersection		Scenario #1 (Pre-COVID)	Scenario #2 (Both Closed)	Scenario #3 (Main Closed)
2	Randolph Street & Center Street	<b>Signal Recommended</b> Delays for EB and WB Stop control approaches.	<b>All Way Stop Control Recommended</b> Delays for EB and WB Stop control approaches.	<b>Signal Recommended</b> Delays for EB and WB Stop control approaches.
8	Main Street & Hutton Street	<b>Signal Timing Optimization Recommended</b>	n/a	
9	Main Street & Griswold Street	<b>Signal Timing Optimization Recommended</b>		
12	Cady Street & Center Street	<b>Signal Recommended</b> Delays for EB and WB Stop control approaches.	<b>All Way Stop Control Recommended</b> Delays for EB and WB Stop control approaches.	<b>Signal Recommended</b> Delays for EB and WB Stop control approaches.
21	Fairbrook Street & Center Street	<i>A review of network simulations indicates acceptable operations. Queue lengths were minimal and vehicles were able to find gaps in traffic.</i>	n/a	<i>A review of network simulations indicates acceptable operations. Queue lengths were minimal and vehicles were able to find gaps in traffic.</i>
22	Seven Mile Road & Wing Street / St. Lawrence	<i>A review of network simulations indicates acceptable operations. Queue lengths were minimal and vehicles were able to find gaps in traffic.</i>		n/a
23	Seven Mile Road & Sheldon Avenue / Center Street	<b>Option 2:</b> Widen the bridge/culvert across the Johnson Creek to provide a NB left-turn lane with 500- ft of storage length. <b>is recommended.</b>	n/a	<b>Option 2:</b> Widen the bridge/culvert across the Johnson Creek to provide a NB left-turn lane with 500- ft of storage length. <b>is recommended.</b>
24	Seven Mile Road & Hines Drive	<i>Delays on the NB approach are due to impacts/queue lengths extending from Seven Mile Road &amp; Sheldon Avenue / Center Street intersection.</i>	n/a	<i>Delays on the WB and NB approach are due to impacts/queue lengths extending from Seven Mile Road &amp; Sheldon Avenue / Center Street intersection.</i>
26/ 27	Northville Road & N. Seven Mile Road	<b>Signal Recommended</b> Delays for WB Stop control approach, northbound left-turn sight distance limitations.		
28	Northville Road & S. Seven Mile Road	<b>Signal Timing Optimization Recommended</b>		
32	Center Street & Proposed Beal Street	<i>A review of network simulations indicates acceptable operations. Queue lengths were minimal and vehicles were able to find gaps in traffic.</i>	n/a	n/a

**FIGURE E2: INTERSECTION MITIGATION SUMMARY**



### RECOMMENDATIONS

The results of the traffic study showed that **Scenario 2: Main St. & Center St. Closed** is the preferred roadway operations. The closures have reduced the volume of through traffic in the City of Northville generated from adjacent communities. However, the rerouting of traffic has impacted several intersections, therefore mitigation measures are recommended to accommodate those traffic volumes. The recommended mitigation measures below will improve the existing operations with Scenario 2 and will accommodate the additional site generated traffic volumes at site buildout in 2028. The results of the traffic improvements for Scenario 2 are summarized below.

Scenario 2: Main St. & Center St. Closed				
<b>Randolph Street &amp; Center Street</b> <ul style="list-style-type: none"> <li>• All Way Stop</li> </ul>	<b>Main Street &amp; Griswold Street</b> <ul style="list-style-type: none"> <li>• Signal Timing Optimization</li> </ul>	<b>Cady Street &amp; Center Street</b> <ul style="list-style-type: none"> <li>• All Way Stop</li> </ul>	<b>Northville Road &amp; N. Seven Mile Road</b> <ul style="list-style-type: none"> <li>• New Traffic Signal</li> </ul>	<b>Northville Road &amp; S. Seven Mile Road</b> <ul style="list-style-type: none"> <li>• Signal Timing Optimization</li> </ul>



## 1 INTRODUCTION

This report presents the results of a Traffic Impact Study (TIS) for the proposed development in the City of Northville, Michigan. The project site is located adjacent to the south side of Cady Street, between Center Street and Griswold Street on the property that was previously occupied by Northville Downs as shown on **Figure 1**. The proposed development includes the construction of mixed-use commercial and multi-family residential units. The City has required a Traffic Impact Study (TIS) for the project as part of the site plan approval process.

**FIGURE 1: SITE LOCATION**



The scope of this study was developed based on Fleis & VandenBrink’s (F&V) knowledge of the study area, understanding of the development program, accepted traffic engineering practice and information published by the Institute of Transportation Engineers (ITE). In addition, the City of Northville and their traffic engineering consultant OHM and planning consultant Carlisle Wortman provided input regarding the scope of work included herein.

The study analyses were completed using Synchro/SimTraffic (Version 11) and Rodel traffic analysis software. Sources of data for this study include traffic counts conducted by F&V subconsultants Traffic Data Collection, Inc. (TDC) and Gewalt Hamilton Associates (GHA), City of Northville, Wayne County Department of Public Services (WCDPS), and ITE. All background information is provided in **Appendix A**.

The study will include the evaluation of three (3) scenarios which are summarized in the table below with the corresponding Section of this report.

	Scenario 1 <i>Baseline Operations (Pre-COVID)</i>	Scenario 2 <i>Main St. &amp; Center St. Closed</i>	Scenario 3 <i>Main St. Closed Only</i>
<b>Section 3</b>	Section 3.1	Section 3.2	Section 3.2
<b>Existing Conditions</b>	Pre-COVID 2018 traffic volumes grown to 2021	2021 Existing Traffic Volumes	2021 Existing Traffic Volumes, adjusted
<b>Section 4</b>	Section 4.1	Section 4.2	Section 4.3
<b>Background Conditions</b>	Baseline + Growth Rate + Background Developments	Existing + Growth Rate + Background Developments	Existing Adj. + Growth Rate + Background Developments
<b>Section 6</b>	Figure 6.1	Figure 6.2	Figure 6.2
<b>Site Traffic Volumes</b>	Site Generated Traffic	Site Generated Traffic	Site Generated Traffic
<b>Section 7</b>	Section 7.1	Section 7.2	Section 7.3
<b>Future Conditions</b>	Background Conditions + Site Generated Traffic	Background Conditions + Site Generated Traffic	Background Conditions + Site Generated Traffic

## 2 BACKGROUND DATA

### 2.1 STUDY ROADWAY NETWORK

Vehicle transportation for the proposed development is provided via Center Street, Cady Street, and Beal Street. Regional transportation is provided via I-96, I-275, and M-14; with access to these routes within 5 miles of the project site location. The lane use and traffic control at the study intersections are shown on **Figures 2.1, 2.2, and 2.3** for Scenarios 1, 2 and 3 respectively and the study roadways are further described below. For the purposes of this study, all minor streets and driveways are assumed to have an operating speed of 25 miles per hour (mph).



Scenario 1  
Baseline Operations (Pre-COVID)



Scenario 2  
Main St. & Center St. Closed



Scenario 3  
Main St. Closed Only



#### Center Street / Sheldon Avenue

- Functional Classification: Other Principal Arterial
- Runs in the north and south directions, generally adjacent to the west side of the project site.
- North of Hines Drive/7 Mile Road: Center Street, Average Annual Daily Traffic (AADT) volume of 14,175 vehicles per day (SEMCOG 2018), under the jurisdiction of the City of Northville.
- South of Hines Drive/7 Mile Road: Regional Name Sheldon Road and is under the jurisdiction of WCDPS.
- North of Cady: 25 mph, on-street parking
- South of Cady Street: 35 mph, bike lanes
- The roadway is a typical two-lane cross-section, with one lane in each direction.
- At the intersection with Hines Drive/7 Mile Road, the roadway is striped as a single shared lane for northbound and southbound traffic. However, vehicles on the northbound and southbound approaches utilize the available pavement width as a short left-turn lane and a shared through/right-turn lane.



**Northville Road**

- Functional Classification: Minor Arterial.
- Under the jurisdiction of WCDPS
- Runs in the north and south directions, generally east side of the project site.
- Average Annual Daily Traffic (AADT) volume of 17,000 vehicles per day (MDOT 2019),
- Speed Limit varies 25 mph to 40 mph
- Four-lane cross-section with two lanes in each direction
- Undivided south of 7 Mile Road (south)
- Median divided at 7 Mile Road (north)



**Main Street**


- Functional Classification: Minor Arterial
- Runs in the east and west directions, north of the project site.
- Average Annual Daily Traffic (AADT) volume of 8,175 vehicles per day (SEMCOG 2018), under the jurisdiction of the City of Northville.
- South of Hines Drive/7 Mile Road: Regional Name Sheldon Road and is under the jurisdiction of WCDPS.
- Speed Limit 25 mph
- On-street parking provided on both sides of the roadway.
- The roadway is a typical two-lane cross-section, with one lane in each direction.
- On-street parking typically ends prior to an intersection, in order to provide short (25-50 ft typical) right-turn lanes at the intersections..
- The section of roadway east of Griswold Street becomes S. Main Street; for the purposes of this study S. Main Street is labeled Northville Road, specifically at the intersection with Beal Street.





**7 Mile Road**

- Functional Classification: Minor Arterial.
- Under the jurisdiction of WCDPS
- Runs in the east and west directions, adjacent to the south site of the project site..
- Average Annual Daily Traffic (AADT) volume of 8,155 vehicles per day (SEMCOG 2019),
- Speed Limit 35 mph
- The study section of 7 Mile Road is split at Northville Road for the purposes of this study: West of Northville Road referred to as N. 7 Mile Road , East of Northville Road referred to as S. 7 Mile Road
- The study section of roadway (N. 7 Mile Road) is a typical three-lane cross-section, with one lane in each direction and a center two-way left-turn lane.

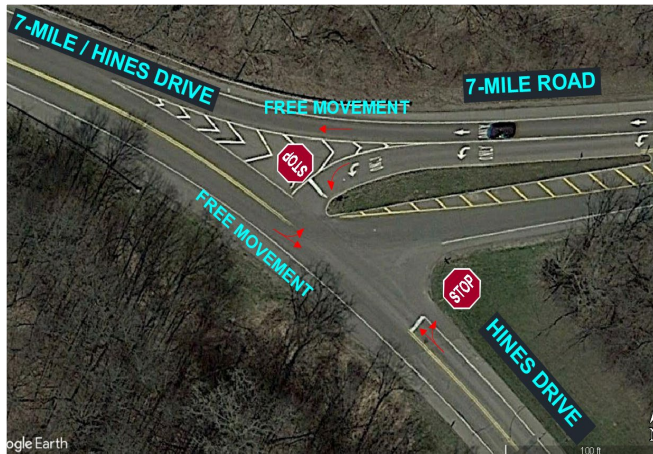

**Edward N. Hines Drive**

- Functional Classification: Other Principal Arterial.
- Under the jurisdiction of WCDPS
- Runs in the east/southeast and west/northwest directions south side of the project site..
- South of 7 Mile Road Average Annual Daily Traffic (AADT) volume of 3,800 vehicles per day (MDOT 2019),
- Speed Limit 35 mph to 40 mph
- The roadway is a typical two-lane cross-section with one lane in each direction.
- The adjacent exhibit further depicts the unique intersection geometry and operations of the Edward N. Hines Drive and 7 Mile Road intersection.



**Cady Street**

- Functional Classification: Local Road
- Under the jurisdiction of City of Northville
- Runs in the east and west directions, adjacent to the north side of the project site..
- Speed Limit 25 mph
- The roadway has a typical two-lane cross-section with one lane in each direction and has on-street parking on both sides of the road between Hutton Street and Griswold Street.



**Griswold Street**

- North of Main Street under the jurisdiction of WCDPS north of Main Street and a Minor Arterial functional classification:
- South of Main Street under the jurisdiction of the City of Northville and a Local Road functional classification:
- Runs in the north and south directions, generally east of the project site.
- Average Annual Daily Traffic (AADT) volume of 7,500 vehicles per day (MDOT 2019)
- Speed Limit 35 mph
- Two-lane cross-section with one lane in each direction
- On-street parking south of Main Street adjacent to the west side of the road



**Hutton Street**

- Functional Classification: Local Road
- Under the jurisdiction of the City of Northville :
- Runs in the north and south directions, generally north of the project site.
- Speed Limit 25 mph
- Two-lane cross-section with one lane in each direction
- On-street parking north of Main Street on both sides of the roadway.





**Wing Street**

- Functional Classification: Local Road
- Under the jurisdiction of the City of Northville :
- Runs in the north and south directions, west of the project site.
- Parrell route to Center Street between Randolph St. and 7 Mile Road.
- Speed Limit 25 mph
- Two-lane cross-section with one lane in each direction
- On-street parking on both sides of the roadway (with a few exceptions along the roadway)



**Randolph Street**

- Functional Classification: Major Collector
- Under the jurisdiction of City of Northville
- Runs in the east and west directions, north of the project site.
- Average Annual Daily Traffic (AADT) volume of 4,120 vehicles per day (SEMCOG 2019)
- Speed Limit 25 mph
- The roadway has a typical two-lane cross-section with one lane in each direction



**Dunlap Street**

- Functional Classification: Local Road
- Under the jurisdiction of City of Northville
- Runs in the east and west directions, north of the project site.
- Speed Limit 25 mph
- The roadway has a typical two-lane cross-section with one lane in each direction




**Fairbrook Street**

- Functional Classification: Local Road
- Under the jurisdiction of City of Northville
- Runs in the east and west directions, west of the project site.
- Speed Limit 25 mph
- The roadway has a typical two-lane cross-section with one lane in each direction and has on-street parking on both sides of the roadway.



**Beal Street**

- Functional Classification: Local Road
- Under the jurisdiction of City of Northville
- Runs in the east and west directions, adjacent to the west side of the project site.
- Speed Limit 25 mph
- The roadway has a typical two-lane cross-section with one lane in each direction

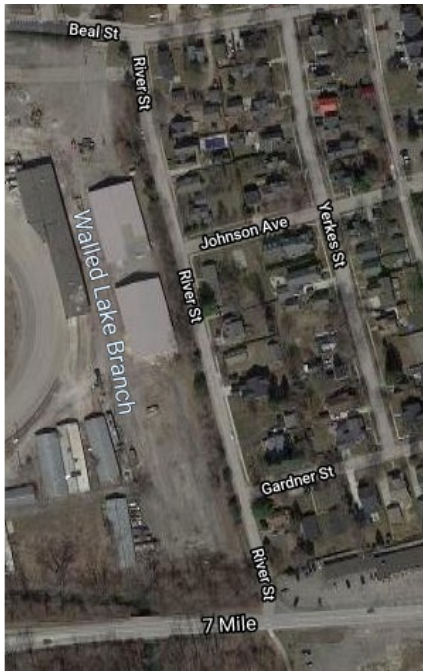

**River Street**

- Functional Classification: Local Road
- Under the jurisdiction of the City of Northville :
- Runs in the north and south directions, adjacent to the east side of the project site.
- Speed Limit 25 mph
- Two-lane cross-section with one lane in each direction

## 2.2 TRAFFIC VOLUME DATA

Traffic volume data was collected at the study intersections by F&V subconsultants, Traffic Data Collection Inc. (TDC) on May 15, 2018, and October 18, 2018, and by Gewalt Hamilton Associates, Inc (GHA) on October 19, 2021, during the weekday AM (7:00 AM-9:00 AM) and PM (4:00 PM-6:00 PM) peak periods. The data collection performed is summarized below and the raw traffic volume data are included in **Appendix A**.

The data collection was intentionally performed on a day with no live events at the Northville Downs racetrack to avoid any additional traffic generated by the peak existing operations. During collection of the manual intersection turning movement counts, pedestrian data and commercial truck percentages were recorded and used in the traffic analysis. Peak Hour Factors (PHFs) were also calculated for each study intersection approach.

Data Collection May 15, 2018 (TDC) October 19, 2021 (GHA)	Data Collection October 1, 2018 (TDC) October 19, 2021 (GHA)	Data Collection October 19, 2021 (GHA)
<ul style="list-style-type: none"> <li>• Main Street &amp; Center Street</li> <li>• Main Street &amp; Hutton Street</li> <li>• Main Street &amp; Griswold Street</li> <li>• Main Street &amp; Cady Street</li> <li>• Cady Street &amp; Center Street</li> <li>• Cady Street &amp; Hutton Street</li> <li>• Cady Street &amp; Church Street</li> <li>• Cady Street &amp; Griswold Street</li> <li>• Beal Street &amp; Griswold Street</li> <li>• Beal Street &amp; River Street</li> <li>• Seven Mile Road &amp; First Street / Fairbrook</li> <li>• Fairbrook Street &amp; Center Street</li> <li>• Seven Mile Road &amp; Sheldon Avenue / Center Street</li> <li>• Seven Mile Road &amp; Hines Drive</li> <li>• Seven Mile Road &amp; River Street</li> </ul>	<ul style="list-style-type: none"> <li>• Beal Street &amp; Northville Road</li> <li>• SB Northville Road &amp; N. Seven Mile Road</li> <li>• NB Northville Road &amp; N. Seven Mile Road</li> <li>• Northville Road &amp; S. Seven Mile Road</li> </ul>	<ul style="list-style-type: none"> <li>• Randolph Street &amp; Wing Street</li> <li>• Randolph Street &amp; Center Street</li> <li>• Dunlap Street &amp; Wing Street</li> <li>• Center Street &amp; Dunlap Street</li> <li>• Dunlap Street &amp; Hutton Street</li> <li>• Main Street &amp; Wing Street</li> <li>• Cady Street &amp; Wing Street</li> <li>• Fairbrook Street &amp; Wing Street</li> <li>• Seven Mile Road &amp; Wing Street / St. Lawrence Blvd</li> </ul>



### 3 EXISTING CONDITIONS ANALYSIS (2021)

The existing conditions analysis performed an evaluation for the three (3) scenarios as summarized below.

Section 3	Section 3.1	Section 3.2	Section 3.2
<b>Existing Conditions</b>	<b>Scenario 1</b> <i>Baseline Operations (Pre-COVID)</i>	<b>Scenario 2</b> <i>Main St. &amp; Center St. Closed</i>	<b>Scenario 3</b> <i>Main St. Closed Only</i>
<b>Existing Traffic Volumes</b>	Pre-COVID 2018 traffic volumes grown to 2021	2021 Existing Traffic Volumes	2021 Existing Traffic Volumes, adjusted

The existing AM and PM peak hour vehicle delays and Levels of Service (LOS) were calculated at the study intersections using Synchro (Version 11) traffic analysis software.

There are several study intersections where the traffic control used are not supported by the HCM 6<sup>th</sup> Edition analysis methodology; therefore, HCM2000 and SimTraffic simulation delays were determined to be more appropriate for use at these intersections. All remaining study intersections and driveways were analyzed using the HCM 6<sup>th</sup> Edition methodology. These intersections are summarized below:

- *Griswold Street & Beal Street*: The two-way stop control on the eastbound and southbound approaches at the T-intersection is not supported by the HCM. Therefore, SimTraffic delays were utilized.
- *Seven Mile Road & First Street/Fairbrook*: The stop control for southbound First Street and westbound Fairbrook Street is not supported by the HCM. Therefore, SimTraffic delays were utilized.
- *Seven Mile Road & Hines Drive*: The stop control for northbound Hines Drive and the westbound left-turn movement for Seven Mile Road is not supported by the HCM. Therefore, SimTraffic delays were utilized.
- *Northville Road & N. Seven Mile Road*: The yield control at the median crossover at the intersection is not supported by HCM 6<sup>th</sup> edition. Therefore, HCM 2000 analysis was utilized.

Descriptions of LOS “A” through “F” as defined in the HCM are provided in **Appendix B** for signalized and unsignalized intersections. Typically, LOS D is considered acceptable, with LOS A representing minimal delay, and LOS F indicating failing conditions.

#### 3.1 SCENARIO 1 - BASELINE OPERATIONS (PRE-COVID)

The traffic volumes for this analysis utilized the existing 2018 (Pre-COVID) turning movement counts collected at the study intersections. A background growth rate of 0.2% provided by SEMCOG was applied to the 2018 traffic counts to calculate the baseline 2021 traffic volumes. There are several intersections which were added into the scope of work for this study, and therefore did not have 2018 traffic volume data. In order to evaluate these intersections under the Pre-COVID conditions the traffic volumes were adjusted and balanced with the adjacent roadway network considering the reductions in traffic volumes due to COVID and the redistribution of traffic associated with the current downtown street closures on Center Street and Main Street. The peak hour volumes for each intersection were utilized and the volumes were balanced upward through the study network. At locations where access is provided between study intersections, “dummy” intersections were used to account for sink and source volumes, and through volumes were carried along the main study roadways. The results of the Scenario 1 existing conditions analysis were based on the lane use and traffic control shown on **Figure 2.1 in Appendix A** and the traffic volumes shown on **Figure 3.1 in Appendix B**.

#### Additional Study Intersections Collected October 2021

- Randolph Street & Wing Street
- Randolph Street & Center Street
- Dunlap Street & Wing Street
- Center Street & Dunlap Street
- Dunlap Street & Hutton Street
- Main Street & Wing Street
- Cady Street & Wing Street
- Fairbrook Street & Wing Street
- Seven Mile Road & Wing Street / St. Lawrence Blvd



### 3.2 SCENARIO 2 – MAIN ST. & CENTER ST. CLOSED

The traffic volumes for this analysis utilized the existing 2021 turning movement counts collected at the study intersections. No COVID adjustment factors were applied to the traffic volumes and the analysis included in the current roadway operations, including the closures on Center Street and Main Street. The peak hour volumes for each intersection were utilized and the volumes were balanced upward through the study network. At locations where access is provided between study intersections, “dummy” intersections were used to account for sink and source volumes, and through volumes were carried along the main study roadways. The results of the Scenario 2 existing conditions analysis were based on the lane use and traffic control shown on **Figure 2.1 in Appendix A** and the traffic volumes shown on **Figure 3.2. in Appendix B**

### 3.3 SCENARIO 3 - MAIN ST. CLOSED ONLY

The traffic volumes for this analysis utilized the existing 2021 turning movement counts collected at the study intersections. No COVID adjustment factors were applied to the traffic volumes and the analysis included the current roadway operations with the closures on Main Street. This evaluation included reopening Center Street, therefore for analysis purposes, Scenario 1 traffic volumes from Center Street to the west would be utilized and Scenario 2 traffic volumes east of Center Street would be utilized. The peak hour volumes for each intersection were utilized and the volumes were balanced upward through the study network. At locations where access is provided between study intersections, “dummy” intersections were used to account for sink and source volumes, and through volumes were carried along the main study roadways. The results of the Scenario 3 existing conditions analysis were based on the lane use and traffic control shown on **Figure 2.1 in Appendix A** and the traffic volumes shown on **Figure 3.3 in Appendix B**.

### 3.4 EXISTING CONDITIONS ANALYSIS SUMMARY

The results of the existing conditions analysis summarized in **Table 3.1** and are presented in **Appendix B**. The results of the existing conditions analysis indicate that all study intersection approaches and movements currently operate acceptably at a LOS D or better, with the exception of those highlighted in **Table 3.1**.

In order to improve traffic operations to a LOS D or better for all intersection approaches and movements in the existing condition scenarios, mitigation measures were investigated and are summarized in **Table 3.3**. The results of the analysis with the recommendations are summarized in **Table 3.3**.

**Table 3.1: Existing Conditions Analysis Summary**

Intersection	Control	Approach	Scenario #1 (Pre-COVID)				Scenario #2 (Both Closed)				Scenario #3 (Main Closed)			
			AM Peak		PM Peak		AM Peak		PM Peak		AM Peak		PM Peak	
			Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS
1 Randolph Street & Wing Street	Stop (Minor)	EB	Free				Free				Free			
		WBL	7.8	A	8.2	A	7.7	A	8.1	A	7.7	A	8.1	A
		NB	11.9	B	18.9	C	11.0	B	16.9	C	11.3	B	15.8	C
2 Randolph Street & Center Street	Stop (Minor)	EB	39.5	E	265.4	F	19.0	C	34.3	D	27.4	D	154.5	F
		WB	34.3	D	154.6	F	18.2	C	25.9	D	30.2	D	79.4	F
		NBL	9.3	A	9.3	A	8.8	A	8.5	A	8.9	A	9.0	A
		SBL	8.5	A	9.0	A	8.0	A	8.4	A	8.7	A	9.2	A
3 Dunlap Street & Wing Street	Stop (All-Way)	EB	8.6	A	9.7	A	10.0	A	12.0	B	8.4	A	9.2	A
		WB	9.0	A	12.1	B	15.7	C	23.5	C	8.7	A	10.9	B
		NB	8.5	A	11.4	B	12.4	B	25.3	D	8.4	A	10.5	B
		SB	8.9	A	10.3	B	10.8	B	14.5	B	8.8	B	9.7	A
		<b>Overall</b>	<b>8.8</b>	<b>A</b>	<b>11.2</b>	<b>B</b>	<b>13.2</b>	<b>B</b>	<b>21.5</b>	<b>C</b>	<b>8.6</b>	<b>A</b>	<b>10.3</b>	<b>B</b>
4 Center Street & Dunlap Street	Scenario #1 Signalized / Scenario #2 Stop (All-Way) / Scenario #3 Signalized	EBL	21.4	C	25.1	C	15.1	C	18.7	C	25.9	C	38.8	D
		EBTR	18.7	B	19.2	B	10.1	B	11.2	B	18.5	B	19.7	B
		WBL	19.1	B	17.4	B	N/A				18.8	B	19.9	B
		WBTR	19.7	B	20.3	C	11.6	B	18.2	C	22.9	C	39.6	D
		NBL	1.6	A	3.5	A	N/A				1.1	A	2.3	A
		NBTR	1.3	A	2.0	A	N/A				1.1	A	1.2	A
		SBL	6.3	A	5.9	A	14.6	B	18.7	C	6.0	A	5.7	A
		<b>Overall</b>	<b>7.6</b>	<b>A</b>	<b>9.3</b>	<b>A</b>	<b>13.4</b>	<b>B</b>	<b>16.9</b>	<b>C</b>	<b>8.9</b>	<b>A</b>	<b>14.3</b>	<b>B</b>
5 Dunlap Street & Hutton Street	Stop (Minor)	EBL	7.6	A	8.1	A	8.0	A	8.5	A	7.9	A	8.5	A
		WB	Free				Free				Free			
		SB	10.6	B	13.8	B	13.5	B	19.7	C	13.3	B	19.7	C
6 Main Street & Wing Street	Stop (All-Way)	EB	10.0	A	10.9	B	11.6	B	13.5	B	9.7	A	10.0	A
		WB	8.9	A	9.9	A	9.8	A	12.5	B	8.5	A	8.8	A
		NB	8.9	A	11.3	B	10.7	B	18.0	C	8.6	A	9.9	A
		SB	9.9	A	10.3	B	15.1	C	18.2	C	9.4	A	9.3	A
		<b>Overall</b>	<b>9.6</b>	<b>A</b>	<b>10.7</b>	<b>B</b>	<b>12.7</b>	<b>B</b>	<b>16.3</b>	<b>C</b>	<b>9.2</b>	<b>A</b>	<b>9.7</b>	<b>A</b>
7 Main Street & Center Street	#1 & #3 Signalized / #2 Stop (All-Way)	EB	20.0	B	20.1	C	7.3	A	7.4	A	19.9	B	18.1	C
		WB	19.2	B	19.7	B	N/A				N/A			
		NB	9.8	A	10.0	B	8.3	A	8.8	A	9.0	A	8.9	A
		SB	1.1	A	1.8	A	N/A				0.9	A	1.5	A
		<b>Overall</b>	<b>9.6</b>	<b>A</b>	<b>10.1</b>	<b>B</b>	<b>7.8</b>	<b>A</b>	<b>8.3</b>	<b>A</b>	<b>7.7</b>	<b>A</b>	<b>6.1</b>	<b>A</b>
8 Main Street & Hutton Street	Scenario #1 Signalized / #2 & #3 Stop (All-Way)	EBTL	0.3	A	0.3	A	N/A				N/A			
		EBR	0.0	A	0.0	A	N/A				N/A			
		WBTL	12.7	B	7.6	A	9.5	A	10.1	B	9.5	A	10.1	B
		WBR	13.5	B	9.2	A	10.3	B	14.4	B	10.2	B	14.4	A
		NB	17.2	B	19.1	B	10.5	B	11.6	B	10.2	B	11.6	B
		SBTL	21.3	C	70.2	E	12.7	B	15.7	C	12.7	B	15.7	C
		SBR	16.5	B	16.5	B	8.8	A	9.9	A	8.8	A	9.9	A
		<b>Overall</b>	<b>12.6</b>	<b>B</b>	<b>22.1</b>	<b>C</b>	<b>10.9</b>	<b>B</b>	<b>13.5</b>	<b>B</b>	<b>10.8</b>	<b>B</b>	<b>13.5</b>	<b>B</b>

Intersection	Control	Approach	Scenario #1 (Pre-COVID)				Scenario #2 (Both Closed)				Scenario #3 (Main Closed)				
			AM Peak		PM Peak		AM Peak		PM Peak		AM Peak		PM Peak		
			Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS	
9	Main Street & Griswold Street	Signalized	EBTL	12.0	B	24.1	C	9.6	A	10.2	B	9.6	A	10.2	B
			EBTR	10.1	B	17.8	B	9.7	A	10.2	B	9.7	A	10.2	B
			WBTL	10.1	B	11.8	B	10.4	B	11.1	B	10.4	B	11.1	B
			WBTR	10.5	B	12.5	B	10.8	B	11.9	B	10.8	B	11.9	B
			NB	15.3	B	16.4	B	16.2	B	16.7	C	15.6	B	16.0	C
			SB	17.0	B	32.3	C	17.4	B	25.9	C	17.4	B	22.7	C
			<b>Overall</b>	<b>12.9</b>	<b>B</b>	<b>20.2</b>	<b>C</b>	<b>13.2</b>	<b>B</b>	<b>16.2</b>	<b>B</b>	<b>13.0</b>	<b>B</b>	<b>15.0</b>	<b>B</b>
10	Main Street & Cady Street	Stop (Minor)	EB	Free				Free				Free			
			WBL	7.9	A	8.6	A	8.0	A	8.4	A	8.0	A	8.4	A
			NB	9.7	A	13.3	B	10.2	B	12.5	B	10.2	B	12.5	B
11	Cady Street & Wing Street	Stop (All-Way)	EB	8.5	A	8.9	A	9.5	A	9.8	A	8.2	A	8.5	A
			WB	8.0	A	8.6	A	9.2	A	10.0	A	7.9	A	8.3	A
			NB	8.1	A	9.3	A	9.3	A	11.3	B	8.0	A	8.9	A
			SB	8.9	B	9.4	A	11.9	B	12.7	B	8.5	A	8.9	A
			<b>Overall</b>	<b>8.5</b>	<b>A</b>	<b>9.1</b>	<b>A</b>	<b>10.5</b>	<b>B</b>	<b>11.4</b>	<b>B</b>	<b>8.3</b>	<b>A</b>	<b>8.7</b>	<b>A</b>
12	Cady Street & Center Street	Stop (Minor)	EB	19.5	C	37.7	E	14.7	B	22.9	C	33.9	D	116.1	F
			WB	44.9	E	132.3	F	44.6	E	331.8	F	250.9	F	1554.5	F
			NBL	8.4	A	9.2	A	7.6	A	7.7	A	8.2	A	8.7	A
			SBL	9.0	A	8.9	A	8.2	A	8.5	A	9.0	A	9.2	A
13	Cady Street & Hutton Street	Stop (Minor)	EBL	7.8	A	7.6	A	8.4	A	8.3	A	8.3	A	8.0	A
			WB	Free				Free				Free			
			SB	11.5	B	10.2	B	11.7	B	14.8	B	11.4	B	12.7	B
14	Cady Street & Church Street	Stop (Minor)	EB	Free				Free				Free			
			WB	Free				Free				Free			
			SB	10.3	B	9.9	A	11.7	B	11.5	B	11.5	B	10.9	B
15	Cady Street & Griswold Street	Stop (Minor)	EB	11.0	B	13.9	B	12.9	B	15.1	C	12.3	B	13.5	B
			WB	9.5	A	11.0	B	11.1	B	10.7	B	11.1	B	10.4	B
			NBL	7.4	A	7.6	A	7.6	A	7.9	A	7.6	A	7.8	A
			SBL	7.3	A	7.4	A	7.3	A	7.3	A	7.3	A	7.3	A
16	Beal Street & Griswold Street	Stop (EB & SB)	EB	0.0*	A	0.0*	A	0.0*	A	0.0*	A	0.0*	A	0.0*	A
			WB	Free				Free				Free			
			SB	0.0**	A	3.9**	A	3.7**	A	3.9**	A	3.7**	A	3.9**	A
17	Beal Street & River Street	Stop (Minor)	EB	Free				Free				Free			
			WBL	7.3	A	7.4	A	7.3	A	7.4	A	7.3	A	7.4	A
			NB	9.1	A	9.8	A	9.1	A	9.5	A	9.1	A	9.5	A
18	Beal Street & Northville Road	Stop (Minor)	EB	10.5	B	12.6	B	9.8	A	11.3	B	9.8	A	11.3	B
			NBL	8.0	A	8.6	A	8.0	A	8.5	A	8.0	A	8.5	A
			SB	Free				Free				Free			
19	Seven Mile Road & First Street / Fairbrook Street	Stop (Minor)	EBL	1.7**	A	6.7**	A	1.8**	A	3.5**	A	5.0**	A	2.1**	A
			WB	Free				Free				Free			
			SB	10.0**	B	27.9**	D	9.6**	A	12.5**	B	9.3**	A	16.6**	C
			SW	6.8**	A	12.1**	B	6.5**	A	9.6**	A	7.1**	A	8.5**	A

Intersection	Control	Approach	Scenario #1 (Pre-COVID)				Scenario #2 (Both Closed)				Scenario #3 (Main Closed)			
			AM Peak		PM Peak		AM Peak		PM Peak		AM Peak		PM Peak	
			Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS
20 Fairbrook Street & Wing Street	Stop (All-Way)	EB	7.5	A	8.1	A	8.0	A	8.4	A	7.4	A	8.0	A
		WB	6.8	A	7.9	A	7.4	A	8.1	A	6.7	A	7.7	A
		NB	7.5	A	8.5	A	8.3	A	8.7	A	7.5	A	8.2	A
		SB	7.5	A	8.3	A	8.9	A	9.3	A	7.4	A	8.1	A
		<b>Overall</b>	<b>7.4</b>	<b>A</b>	<b>8.2</b>	<b>A</b>	<b>8.5</b>	<b>A</b>	<b>8.9</b>	<b>A</b>	<b>7.3</b>	<b>A</b>	<b>8.0</b>	<b>A</b>
21 Fairbrook Street & Center Street	Stop (Minor)	EB	22.6	C	23.2	C	14.5	B	13.7	B	18.3	B	18.9	B
		NBL	8.5	A	10.1	B	8.3	A	8.3	A	8.3	A	9.5	A
		SB	Free				Free				Free			
22 Seven Mile Road & Wing Street / St. Lawrence Blvd	Stop (Minor)	EBL	7.7	A	9.2	A	7.9	A	8.9	A	7.8	A	8.9	A
		WBL	8.8	A	8.4	A	8.2	A	8.1	A	8.2	A	8.5	A
		NB	15.3	C	22.3	C	13.2	B	17.9	C	12.9	B	21.0	C
		SB	17.4	C	39.4	E	22.7	C	95.0	F	14.6	B	32.0	D
23 Seven Mile Road & Sheldon Avenue / Center Street	Signalized	EBL	20.6	C	33.1	C	20.5	C	31.0	C	21.5	C	30.1	C
		EBTR	33.3	C	26.7	C	29.5	C	28.5	C	23.3	C	27.3	C
		WBL	37.6	D	39.4	D	39.9	D	50.8	D	27.0	C	38.6	D
		WBT	18.3	B	27.8	C	18.8	B	26.4	C	18.9	B	25.2	C
		WBR	17.4	B	18.4	B	16.8	B	17.9	B	17.2	B	18.1	B
		NBL	19.9	B	40.0	D	22.1	C	20.5	C	18.2	B	30.4	C
		NBTR	21.6	C	27.5	C	16.7	B	19.4	B	18.8	B	21.8	C
		SBL	33.3	C	43.0	D	21.2	C	27.5	C	27.0	C	31.5	C
		SBTR	15.4	B	21.7	C	15.9	B	14.3	B	14.6	B	18.9	B
<b>Overall</b>	<b>23.6</b>	<b>C</b>	<b>27.1</b>	<b>C</b>	<b>21.3</b>	<b>C</b>	<b>24.0</b>	<b>C</b>	<b>19.3</b>	<b>B</b>	<b>23.9</b>	<b>C</b>		
24 Seven Mile Road & Hines Drive	Stop (NB Hines & WBL 7 Mile)	WBL	13.1**	B	22.4**	C	11.2**	B	17.6**	C	4.3**	A	21.8**	C
		WBR	Free				Free				Free			
		NB	17.0**	C	31.1**	D	14.3**	B	25.1**	D	12.6**	B	25.5**	D
		SBL	4.7**	A	4.0**	A	3.9**	A	3.8**	A	3.6**	A	4.3**	A
25 Seven Mile Road & River Street	Stop (Minor)	EBL	7.7	A	8.7	A	7.8	A	8.6	A	7.8	A	8.6	A
		WB	Free				Free				Free			
		SB	11.0	B	13.7	B	10.9	B	13.9	B	10.9	B	13.9	B
26 SB Northville Road & N. Seven Mile Road	Stop/Yield (Minor)	EBT	11.5	B	14.4	B	11.5	B	13.9	B	11.5	B	13.9	B
		EBR	12.2	B	13.7	B	10.9	B	13.3	B	10.9	B	13.3	B
		WB	13.9	B	69.2	F	13.8	B	66.8	F	13.8	B	66.8	F
		SB	Free				Free				Free			
27 NB Northville Road & N. Seven Mile Road	Yield (Minor)	EBL	14.5	B	32.2	D	15.1	C	32.0	D	15.1	C	32.0	D
		NBTL	4.9	A	5.9	A	4.8	A	6.2	A	4.8	A	6.2	A
		NBT	Free				Free				Free			
28 Northville Road & S. Seven Mile Road	Signalized	WBL	21.5	C	22.3	C	21.5	C	24.7	C	21.5	C	24.7	C
		WBR	9.9	A	15.3	B	9.6	A	14.8	B	9.6	A	14.8	B
		NBT	40.0	D	129.2	F	49.9	D	107.9	F	49.9	D	107.9	F
		NBTR	58.8	E	131.7	F	68.8	E	111.6	F	68.8	E	111.6	F
		SBL	57.4	E	44.1	D	37.1	D	39.7	D	37.1	D	39.7	D
		SBT	11.3	B	12.2	B	11.3	B	12.0	B	11.3	B	12.0	B
		<b>Overall</b>	<b>37.1</b>	<b>D</b>	<b>58.7</b>	<b>E</b>	<b>36.3</b>	<b>D</b>	<b>50.1</b>	<b>D</b>	<b>36.3</b>	<b>D</b>	<b>50.1</b>	<b>D</b>

\* Indicates no vehicle volume present \*\* Indicates SimTraffic delay was utilized

**Table 3.2: Existing Intersection Mitigation Summary**

Intersection		Scenario #1 (Pre-COVID)	Scenario #2 (Both Closed)	Scenario #3 (Main Closed)
2	Randolph Street & Center Street	<b>Signal Recommended</b> Delays for EB and WB Stop control approaches.	n/a	<b>Signal Recommended</b> Delays for EB and WB Stop control approaches.
8	Main Street & Hutton Street	<b>Signal Timing Optimization Recommended</b>	n/a	
9	Main Street & Griswold Street	<b>Signal Timing Optimization Recommended</b>		
12	Cady Street & Center Street	<b>Signal Recommended</b> Delays for EB and WB Stop control approaches.	<b>All Way Stop Control Recommended</b> Delays for EB and WB Stop control approaches.	<b>Signal Recommended</b> Delays for EB and WB Stop control approaches.
22	Seven Mile Road & Wing Street / St. Lawrence	<i>A review of network simulations indicates acceptable operations. Queue lengths were minimal, and vehicles were able to find gaps in traffic.</i>		n/a
23	Seven Mile Road & Sheldon Avenue / Center Street	<b>Option 2:</b> Widen the bridge/culvert across the Johnson Creek to provide a NB left-turn lane with 500-ft of storage length. <b>is recommended.</b>		
26/ 27	Northville Road & N. Seven Mile Road	<b>Signal Recommended</b> Delays for WB Stop control approach, northbound left-turn sight distance limitations.		
28	Northville Road & S. Seven Mile Road	<b>Signal Timing Optimization Recommended</b>		


**Table 3.3: Existing Conditions with Mitigation Analysis Summary**

Intersection	Control	Approach	Scenario #1 (Pre-COVID)				Scenario #2 (Both Closed)				Scenario #3 (Main Closed)				
			AM Peak		PM Peak		AM Peak		PM Peak		AM Peak		PM Peak		
			Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS	
2	Randolph Street & Center Street	#1 & #3 Signalized	EB	25.9	C	27.9	C	No Change				26.4	C	26.7	C
			WB	20.9	C	18.5	B					21.8	C	19.4	B
			NB	1.0	A	1.7	A					1.0	A	1.8	A
			SB	7.6	A	9.8	A					6.2	A	8.1	A
			<b>Overall</b>	<b>8.0</b>	<b>A</b>	<b>10.3</b>	<b>B</b>					<b>6.9</b>	<b>A</b>	<b>8.9</b>	<b>A</b>
8	Main Street & Hutton Street	Scenario #1 Signalized / #2 & #3 Stop (All-Way)	EBTL	No Change		20.6	C	No Change				No Change			
			EBR			17.8	B								
			WBTL			17.0	B								
			WBR			23.4	C								
			NB			8.6	A								
			SBTL			11.2	B								
			SBR			8.3	A								
			<b>Overall</b>			<b>17.5</b>	<b>B</b>								
9	Main Street & Griswold Street	Signalized	EBTL	No Change		32.8	C	No Change		15.2	B	No Change		15.2	B
			EBTR			22.4	C			15.0	B				
			WBTL			17.5	B			16.3	B				
			WBTR			19.2	B			18.0	B				
			NB			11.2	B			11.5	B				
			SB			17.5	B			15.4	B				
			<b>Overall</b>			<b>19.0</b>	<b>B</b>			<b>15.2</b>	<b>B</b>			<b>15.0</b>	<b>B</b>
12	Cady Street & Center Street	#1 & #3 Signalized / #2 Stop (All-Way)	EB	24.7	C	22.9	C	10.7	B	13.5	B	22.2	C	19.9	B
			WB	25.9	C	23.6	C	13.2	B	20.2	C	25.3	C	24.6	C
			NB	5.4	A	6.7	A	15.9	C	34.6	D	7.3	A	10.1	B
			SB	0.6	A	1.3	A	10.9	B	14.2	B	0.7	A	1.5	A
			<b>Overall</b>	<b>5.5</b>	<b>A</b>	<b>6.2</b>	<b>A</b>	<b>13.6</b>	<b>B</b>	<b>24.4</b>	<b>C</b>	<b>8.7</b>	<b>A</b>	<b>10.4</b>	<b>B</b>
26	SB Northville Road & N. Seven Mile Road	Signalized	EBL	24.6	C	37.0	D	24.7	C	35.8	D	24.7	C	35.8	D
			EBR	15.5	B	16.6	B	13.6	B	16.5	B	13.6	B	16.5	B
			NBL	6.8	A	4.9	A	6.9	A	4.9	A	6.9	A	4.9	A
			NBT	0.2	A	0.2	A	0.2	A	0.2	A	0.2	A	0.2	A
			SB	24.2	C	25.0	C	24.2	C	24.6	C	24.2	C	24.6	C
			<b>Overall</b>	<b>12.7</b>	<b>B</b>	<b>11.8</b>	<b>B</b>	<b>11.6</b>	<b>B</b>	<b>12.0</b>	<b>B</b>	<b>11.6</b>	<b>B</b>	<b>12.0</b>	<b>B</b>
28	Northville Road & S. Seven Mile Road	Signalized	WBL	34.9	C	33.2	C	34.8	C	41.4	D	24.8	C	41.4	D
			WBR	13.0	B	22.6	C	12.6	B	21.6	C	12.6	B	21.6	C
			NBT	29.0	C	41.9	D	31.8	C	38.5	D	31.8	C	38.5	D
			NBTR	34.1	C	43.2	D	36.1	D	39.9	D	36.1	D	39.9	D
			SBL	35.3	D	32.7	C	31.6	C	29.7	C	31.6	C	29.7	C
			SBT	14.0	B	4.2	A	14.0	B	4.2	A	14.0	B	4.2	A
			<b>Overall</b>	<b>28.5</b>	<b>C</b>	<b>29.3</b>	<b>C</b>	<b>28.5</b>	<b>C</b>	<b>28.9</b>	<b>C</b>	<b>28.5</b>	<b>C</b>	<b>28.9</b>	<b>C</b>




### 3.4.1 Center Street and Randolph Street

Several mitigation measures were identified at this intersection in order to address the intersection delays and vehicle queuing identified in all three (3) Scenarios. These alternatives are summarized below.

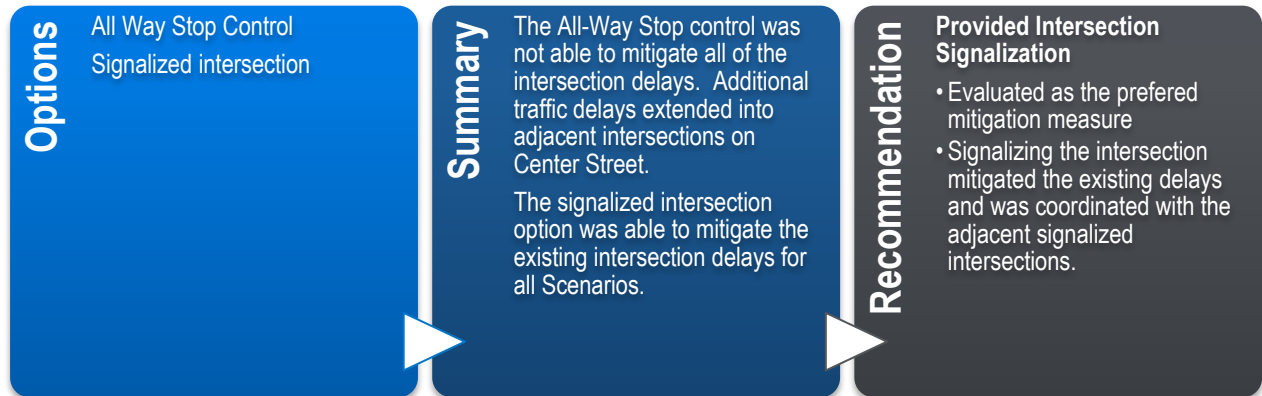


### 3.4.2 Center Street and Cady Street

Several mitigation measures were identified at this intersection in order to address the intersection delays and vehicle queuing identified in all three (3) Scenarios. These alternatives are summarized below.

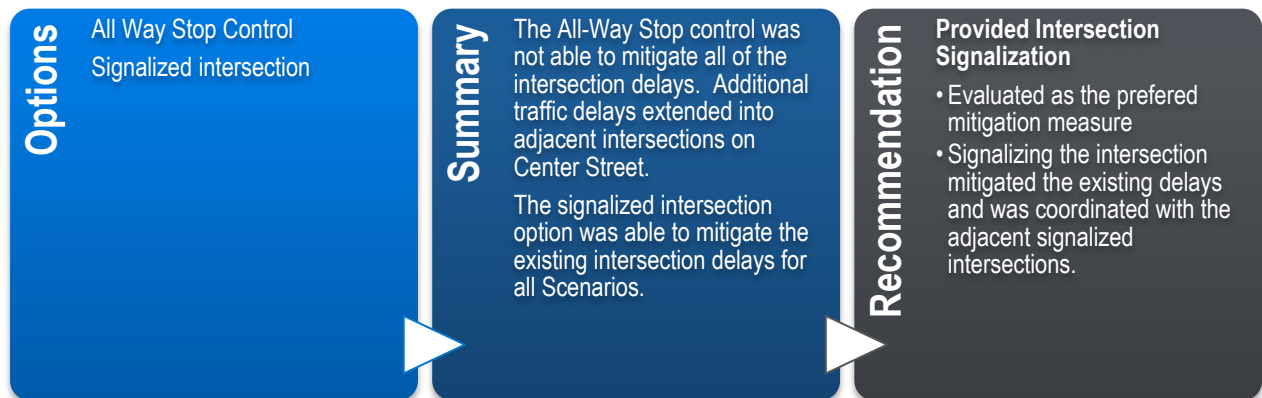

### 3.4.3 Northville Road (S. Main Street) and N. Seven Mile Road

Several mitigation measures were identified at this intersection in order to address the intersection delays and vehicle queuing identified in all three (3) Scenarios. These alternatives are summarized below.

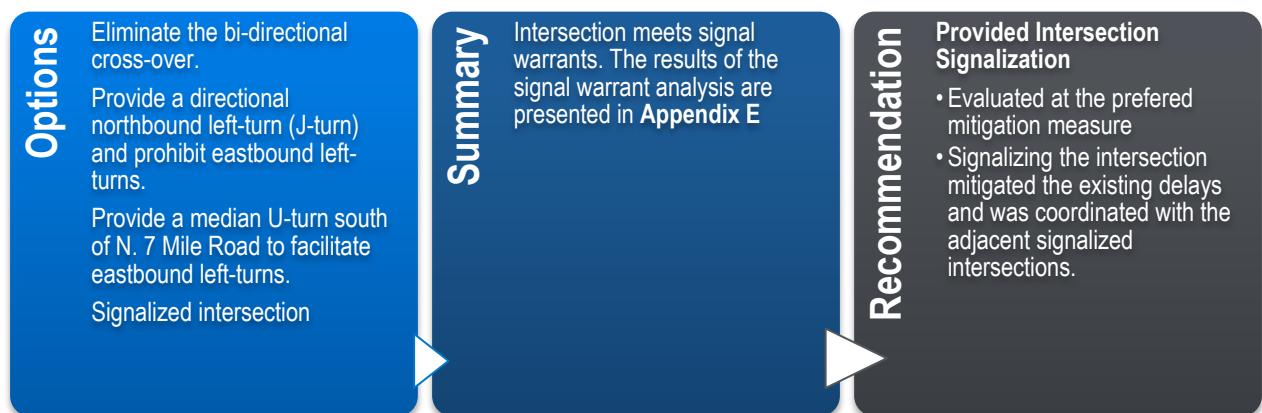

### 3.4.4 Sheldon Avenue/Center Street and Seven Mile Road/Hines Drive

The LOS at this intersection showed acceptable intersection delays; however, review of the Sim Traffic simulations showed long vehicles queues for several movements. Therefore, mitigation measures were investigated at this intersection in order to address the vehicle queuing and subsequent intersection delays. The mitigation measures options evaluated are summarized below and the results of the operations for each option for each scenario are provided on **Tables 3.4, 3.5, and 3.6** for Scenarios 1, 2 and 3 respectively.

#### Option 1: Signalization Improvements

- Upgrade to a fully actuated signal.
- Restripe the NB approach to provide a left-turn lane Note: length would be limited by existing geometric constraints of the bridge.
- Restripe the SB approach to provide an exclusive left-turn lane.

#### Option 2: Increased Northbound Left-Turn Storage

- Widen the bridge/culvert across the Johnson Creek to provide a NB left-turn lane with 300- ft of storage length.
- Restripe the SB approach to provide an exclusive left-turn lane.

#### Option 3: Roundabout

- Additional ROW required, in order to accommodate a roundabout.
- Potential wetland mitigation may be needed.
- Grading and sight distance issues to address
- Will require special design consideration for pedestrians and bicycles.

#### Summary

- The results of the analysis showed that increasing the left-turn storage (Option 2) provided the highest reduction in vehicle queueing.
- However, the reduction in traffic volumes in Scenario 2 overall reduced the traffic impact at this intersection.
- **Therefore, the recommendation for this intersection is: Implement Scenario 2 and maintain closures on Center Street and Main Street.**

**Table 3.4: Scenario 1- Center Street and Seven Mile Road Intersection Mitigation Summary (Existing)**

Peak Period	Approach	Existing Conditions				Op1 Signalization Improvements				Op2 Increased NB LT Storage				Op3 Roundabout			
		Delay (s/veh)	LOS	Avg. (ft)	95th % (ft)	Delay (s/veh)	LOS	Avg. (ft)	95th % (ft)	Delay (s/veh)	LOS	Avg. (ft)	95th % (ft)	Delay (s/veh)	LOS	Avg. (ft)	95th % (ft)
AM	EBL	20.6	C	25	60	23.3	C	30	144	20.6	C	26	84	8.4	A	180	372
	EBTR	33.3	C	163	266	50.4	D	223	371	33.3	C	197	340				
	WBL	37.6	D	20	51	28.6	C	21	43	37.6	D	21	52	4.7	A	27	60
	WBT	18.3	B	47	94	27.5	C	66	117	18.3	B	50	106				
	WBR	17.4	B	13	40	23.2	C	13	35	17.4	B	16	47				
	NBL	19.9	B	27	63	21.0	C	27	61	19.9	B	22	59	11.5	B	1653	3147
	NBT	21.6	C	257	451	50.3	D	415	781	18.6	B	224	414				
	NBR									11.3	B	30	85				
	SBL	33.3	C	57	121	28.4	C	38	72	28.1	C	52	107	5.2	A	78	164
	SBTR	15.4	B	113	202	27.8	C	145	258	15.4	B	123	207				
<b>Overall</b>	<b>23.6</b>	<b>C</b>	<b>N/A</b>	<b>N/A</b>	<b>40.3</b>	<b>D</b>	<b>N/A</b>	<b>N/A</b>	<b>22.3</b>	<b>C</b>	<b>N/A</b>	<b>N/A</b>	<b>8.1</b>				
PM	EBL	33.1	C	26	68	31.7	C	16	44	33.1	C	26	65	10.3	B	192	454
	EBTR	26.7	C	150	243	54.6	D	227	363	26.7	C	144	237				
	WBL	39.4	D	83	188	36.8	D	107	261	39.4	D	92	216	8.6	A	599	785
	WBT	27.8	C	186	292	52.4	D	249	401	27.8	C	206	354				
	WBR	18.4	B	65	174	27.5	C	88	252	18.4	B	76	241				
	NBL	40.0	D	50	75	28.0	C	47	73	40.0	D	171	374	15.9	C	5631	12659
	NBT	27.5	C	2844	5931	54.4	D	2631	4614	20.6	C	304	531				
	NBR									11.6	B	33	85				
	SBL	43.0	D	77	184	29.1	C	81	243	31.8	C	74	179	13.6	B	519	531
	SBTR	21.7	C	223	354	37.3	D	323	509	21.7	C	239	375				
<b>Overall</b>	<b>27.1</b>	<b>C</b>	<b>N/A</b>	<b>N/A</b>	<b>46.0</b>	<b>D</b>	<b>N/A</b>	<b>N/A</b>	<b>24.6</b>	<b>C</b>	<b>N/A</b>	<b>N/A</b>	<b>12.3</b>	<b>B</b>	<b>N/A</b>	<b>N/A</b>	

**Table 3.5: Scenario 2- Center Street and Seven Mile Road Intersection Mitigation Summary (Existing)**

Peak Period	Approach	Existing Conditions				Op1 Signalization Improvements				Op2 Increased NB LT Storage				Op3 Roundabout			
		Delay (s/veh)	LOS	Avg. (ft)	95th % (ft)	Delay (s/veh)	LOS	Avg. (ft)	95th % (ft)	Delay (s/veh)	LOS	Avg. (ft)	95th % (ft)	Delay (s/veh)	LOS	Avg. (ft)	95th % (ft)
AM	EBL	20.5	C	10	33	18.3	B	11	32	20.5	C	9	28	6.9	A	73	128
	EBTR	29.5	C	150	244	31.8	C	173	301	29.5	C	140	237				
	WBL	39.9	D	51	122	21.3	C	33	62	39.9	D	47	95	3.9	A	44	78
	WBT	18.8	B	60	152	20.0	B	56	125	18.8	B	64	119				
	WBR	16.8	B	7	23	16.3	B	10	42	16.8	B	6	27				
	NBL	22.1	C	36	72	21.8	C	35	74	22.1	C	35	79	6.1	A	155	287
	NBT	16.7	B	199	358	30.3	C	228	431	14.9	B	148	288				
	NBR									11.3	B	34	85				
	SBL	21.2	C	18	58	21.7	C	22	53	18.4	B	20	52	5.0	A	65	130
	SBTR	15.9	B	109	180	30.3	C	116	224	15.9	B	105	176				
<b>Overall</b>	<b>21.3</b>	<b>C</b>	<b>N/A</b>	<b>N/A</b>	<b>28.2</b>	<b>C</b>	<b>N/A</b>	<b>N/A</b>	<b>20.6</b>	<b>C</b>	<b>N/A</b>	<b>N/A</b>	<b>5.6</b>	<b>A</b>	<b>N/A</b>	<b>N/A</b>	

Peak Period	Approach	Existing Conditions				Op1 Signalization Improvements				Op2 Increased NB LT Storage				Op3 Roundabout			
		Delay (s/veh)	LOS	Avg. (ft)	95th % (ft)	Delay (s/veh)	LOS	Avg. (ft)	95th % (ft)	Delay (s/veh)	LOS	Avg. (ft)	95th % (ft)	Delay (s/veh)	LOS	Avg. (ft)	95th % (ft)
PM	EBL	31.0	C	17	46	24.8	C	22	91	31.0	C	19	52	7.3	A	80	174
	EBTR	28.5	C	143	234	43.0	D	230	385	28.5	C	146	238				
	WBL	50.8	D	103	220	32.6	C	89	207	50.8	D	88	188				
	WBT	26.4	C	188	359	33.4	C	194	329	26.4	C	170	314	5.6	A	176	336
	WBR	17.9	B	63	262	21.1	C	69	216	17.9	B	52	219				
	NBL	20.5	C	45	74	20.6	C	43	74	20.5	C	53	108	8.0	A	992	1978
	NBT	19.4	B	283	482	38.8	D	418	640	16.2	B	167	338				
	NBR									11.7	B	43	92				
	SBL	27.5	C	47	100	24.3	C	35	69	22.2	C	41	80	6.1	A	105	209
	SBTR	14.3	B	112	174	25.9	C	147	235	14.3	B	105	171				
	<b>Overall</b>	<b>24.0</b>	<b>C</b>	<b>N/A</b>	<b>N/A</b>	<b>33.8</b>	<b>C</b>	<b>N/A</b>	<b>N/A</b>	<b>22.8</b>	<b>C</b>	<b>N/A</b>	<b>N/A</b>	<b>6.7</b>	<b>A</b>	<b>N/A</b>	<b>N/A</b>

**Table 3.6: Scenario 3- Center Street and Seven Mile Road Intersection Mitigation Summary (Existing)**

Peak Period	Approach	Existing Conditions				Op1 Signalization Improvements				Op2 Increased NB LT Storage				Op3 Roundabout			
		Delay (s/veh)	LOS	Avg. (ft)	95th % (ft)	Delay (s/veh)	LOS	Avg. (ft)	95th % (ft)	Delay (s/veh)	LOS	Avg. (ft)	95th % (ft)	Delay (s/veh)	LOS	Avg. (ft)	95th % (ft)
AM	EBL	21.5	C	23	49	21.1	C	17	40	21.5	C	20	51	5.6	A	57	115
	EBTR	23.3	C	125	214	31.1	C	129	234	23.3	C	113	191				
	WBL	27.0	C	20	48	22.6	C	19	45	27.0	C	18	49				
	WBT	18.9	B	67	119	25.8	C	76	137	18.9	B	73	142	4.1	A	45	83
	WBR	17.2	B	12	33	20.5	C	12	35	17.2	B	13	38				
	NBL	18.2	B	20	57	15.1	B	29	72	18.2	B	18	47	7.3	A	249	495
	NBT	18.8	B	200	380	27.2	C	263	446	16.9	B	190	343				
	NBR									11.2	B	30	84				
	SBL	27.0	C	39	84	18.2	B	39	73	23.8	C	40	84	4.8	A	53	109
	SBTR	14.6	B	118	182	19.9	B	104	183	14.6	B	118	197				
	<b>Overall</b>	<b>19.3</b>	<b>B</b>	<b>N/A</b>	<b>N/A</b>	<b>25.1</b>	<b>C</b>	<b>N/A</b>	<b>N/A</b>	<b>18.4</b>	<b>B</b>	<b>N/A</b>	<b>N/A</b>	<b>5.7</b>	<b>A</b>	<b>N/A</b>	<b>N/A</b>
PM	EBL	30.1	C	21	54	26.9	C	22	92	30.1	C	22	53	9.2	A	193	425
	EBTR	27.3	C	156	259	46.3	D	204	325	27.3	C	156	265				
	WBL	38.6	D	67	157	29.1	C	81	204	38.6	D	62	120				
	WBT	25.2	C	164	271	36.1	D	205	325	25.2	C	148	240	6.3	A	348	787
	WBR	18.1	B	50	150	23.9	C	66	197	18.1	B	44	119				
	NBL	30.4	C	47	73	24.0	C	46	74	30.4	C	66	139	10.4	B	5522	11813
	NBT	21.8	C	493	1009	43.3	D	1150	2210	18.1	B	217	370				
	NBR									11.5	B	36	89				
	SBL	31.5	C	66	169	25.3	C	64	201	25.8	C	50	128	9.3	A	519	533
	SBTR	18.9	B	184	282	34.5	C	297	486	18.9	B	199	305				
	<b>Overall</b>	<b>23.9</b>	<b>C</b>	<b>N/A</b>	<b>N/A</b>	<b>37.7</b>	<b>D</b>	<b>N/A</b>	<b>N/A</b>	<b>22.5</b>	<b>C</b>	<b>N/A</b>	<b>N/A</b>	<b>8.8</b>	<b>A</b>	<b>N/A</b>	<b>N/A</b>

## 4 BACKGROUND CONDITIONS ANALYSIS (2028)

The proposed development is expected to have an opening day in 2024 with the first dwelling units occupied, with a full buildout of the site in 2028. Therefore, the background conditions analysis evaluated the projected operations in 2028 **without the proposed development** for the three (3) scenarios as summarized below.

Section 4	Section 4.1	Section 4.2	Section 4.3
<b>Background Conditions</b>	<b>Scenario 1</b> <i>Baseline Operations (Pre-COVID)</i>	<b>Scenario 2</b> <i>Main St. &amp; Center St. Closed</i>	<b>Scenario 3</b> <i>Main St. Closed Only</i>
<b>Background Traffic Volumes</b>	Baseline + Growth Rate + Background Developments	Existing + Growth Rate + Background Developments	Existing adj. + Growth Rate + Background Developments

A background growth was determined to calculate the projected implicit background traffic growth to the site buildout year in 2028. Population and employment data were used in order to determine the applicable growth rate for the existing traffic volumes to the project build-out year of 2028. The SEMCOG community profile for the City of Northville was reviewed and showed an average annual growth rate of 0.20% population growth and a 0.07% employment growth from 2020 to 2045. Therefore, an annual growth rate of 0.20% per year was applied to the existing traffic volumes evaluated in Section 3 for all three (3) scenarios.

In addition to background growth, it is important to account for traffic that will be generated by approved and/or proposed developments within the vicinity of the study area that have yet to be constructed or are currently under construction. The following developments were identified by the City of Northville:

- Cady Project – 6-unit condominium (South side of Cady Street, east of Center Street)
- 355 E. Cady St. - 3-story mixed-use building; first floor Retail, office above
- 455 E. Cady St “Hanger Building”- office space
- Foundry Flask – 78 Multi-Family Units, corner store specialty market

The number of AM and PM peak hour vehicle trips that would be generated by the proposed developments were forecast based on data published by ITE in the *Trip Generation Manual, 10<sup>th</sup> Edition*<sup>1</sup> and the *ITE Trip Generation Handbook, 3<sup>rd</sup> Edition*. The trip distribution that was determined for the proposed Northville Downs development was used to distribute the trip projections for these developments.

### 4.1 SCENARIO 1 - BASELINE OPERATIONS (PRE-COVID)

The traffic volumes for this analysis utilized the baseline 2021 traffic volumes shown on Figure 3.1. A 0.2% annual background growth rate was applied to these traffic volumes and the trips generated by the adjacent developments were added into the study network to calculate the Scenario 1 background conditions traffic volumes. The results of the Scenario 1 background conditions analysis were based on the lane use and traffic control shown on **Figure 2.1** the traffic volumes shown on **Figure 4.1 in Appendix C**.

### 4.2 SCENARIO 2 - MAIN ST. & CENTER ST. CLOSED

The traffic volumes for this analysis utilized the baseline 2021 traffic volumes shown on Figure 3.2. A 0.2% annual background growth rate was applied to these traffic volumes and the trips generated by the adjacent developments were added into the study network to calculate the Scenario 2 background conditions traffic volumes. The results of the Scenario 2 background conditions analysis were based on the lane use and traffic control shown on **Figure 2.1** and the traffic volumes shown on **Figure 4.2 in Appendix C**.

### 4.3 SCENARIO 3 - MAIN ST. CLOSED ONLY

The traffic volumes for this analysis utilized the baseline 2021 traffic volumes shown on Figure 3.3. A 0.2% annual background growth rate was applied to these traffic volumes and the trips generated by the adjacent developments were added into the study network to calculate the Scenario 3 background conditions traffic volumes. The results of the Scenario 3 background conditions analysis were based on the lane use and traffic control shown on **Figure 2.1** the traffic volumes shown on **Figure 4.3 in Appendix C**.

<sup>1</sup>The ITE Trip Generation 11<sup>th</sup> edition was published in October 2021. The trip generation analysis performed for these land uses was performed before the release of this publication, therefore the 10<sup>th</sup> Edition data was utilized for these developments

### 4.4 BACKGROUND CONDITIONS ANALYSIS SUMMARY

The results of the background conditions analysis summarized in **Table 4.1** and are presented in **Appendix C**. The results of the background conditions analysis indicate that all study intersection approaches and movements are expected to operate similar to existing conditions with the following additional delays, highlighted in **Table 4.1**.

In order to improve traffic operations to a LOS D or better for all intersection approaches and movements in the background condition scenarios, the mitigation measures evaluated in the existing conditions analyses were investigated in addition to mitigation measures identified as necessary to accommodate the additional projected background traffic volumes. The recommended mitigation measures are summarized in **Table 4.2** and the results of the analysis with the recommendations is summarized in **Table 4.3**.

**Table 4.1: Background Conditions Analysis Summary**

Intersection	Control	Approach	Scenario #1 (Pre-COVID)				Scenario #2 (Both Closed)				Scenario #3 (Main Closed)					
			AM Peak		PM Peak		AM Peak		PM Peak		AM Peak		PM Peak			
			Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS		
1	Randolph Street & Wing Street	Stop (Minor)	EB	Free				Free				Free				
			WBL	7.8	A	8.3	A	7.7	A	8.1	A	7.7	A	8.1	A	
			NB	12.0	B	19.9	C	11.1	B	17.4	C	11.4	B	16.3	C	
2	Randolph Street & Center Street	Stop (Minor)	EB	42.6	E	308.9	F	19.4	C	38.7	E	28.8	D	187.7	F	
			WB	36.4	E	188.3	F	18.7	C	27.5	D	31.7	D	92.1	F	
			NBL	9.3	A	9.4	A	8.8	A	8.6	A	9.0	A	9.1	A	
			SBL	8.6	A	9.1	A	8.0	A	8.5	A	8.7	A	9.3	A	
3	Dunlap Street & Wing Street	Stop (All-Way)	EB	8.6	A	9.9	A	10.1	B	12.6	B	8.5	A	9.5	A	
			WB	9.1	A	12.6	B	16.3	C	27.0	D	8.8	A	11.4	B	
			NB	8.6	A	11.8	B	12.7	B	28.7	D	8.4	A	10.9	B	
			SB	8.9	A	10.5	B	11.0	B	15.3	C	8.8	B	9.9	A	
			<b>Overall</b>	<b>8.8</b>	<b>A</b>	<b>11.6</b>	<b>B</b>	<b>13.6</b>	<b>B</b>	<b>24.1</b>	<b>C</b>	<b>8.6</b>	<b>A</b>	<b>10.7</b>	<b>B</b>	
4	Center Street & Dunlap Street	Scenario #1 Signalized /	EBL	21.6	C	25.9	C	15.4	C	19.5	C	26.5	C	44.6	D	
			EBTR	18.8	B	19.4	B	10.2	B	11.6	B	18.6	B	19.9	B	
		Scenario #2 Stop (All-Way) /	WBL	19.1	B	17.5	B	N/A				18.9	B	20.1	C	
			WBTR	19.9	B	20.9	C	11.9	B	20.7	C	23.4	C	48.2	D	
		Scenario #3 Signalized	NBL	1.6	A	3.6	A	N/A				1.1	A	2.4	A	
			NBTR	1.3	A	2.1	A	N/A				1.2	A	1.2	A	
				SBL	6.4	A	6.0	A	15.0	B	20.2	C	6.0	A	5.8	A
				SBTR	8.0	A	10.2	B	13.5	B	14.4	B	7.4	A	8.9	A
		<b>Overall</b>	<b>7.7</b>	<b>A</b>	<b>9.6</b>	<b>A</b>	<b>13.7</b>	<b>B</b>	<b>18.2</b>	<b>C</b>	<b>9.2</b>	<b>A</b>	<b>16.6</b>	<b>B</b>		
5	Dunlap Street & Hutton Street	Stop (Minor)	EBL	7.6	A	8.2	A	8.0	A	8.7	A	7.9	A	8.7	A	
			WB	Free				Free				Free				
			SB	10.8	B	14.4	B	13.9	B	21.7	C	13.7	B	21.7	C	
6	Main Street & Wing Street	Stop (All-Way)	EB	10.1	B	11.3	B	11.9	B	13.9	B	9.8	A	10.2	A	
			WB	9.0	A	10.2	B	10.0	A	12.8	B	8.6	A	8.9	A	
			NB	9.0	A	11.6	B	10.9	B	19.0	C	8.7	A	10.1	B	
			SB	10.0	B	10.7	B	15.5	C	19.3	C	9.5	A	9.5	A	
			<b>Overall</b>	<b>9.7</b>	<b>A</b>	<b>11.0</b>	<b>B</b>	<b>13.0</b>	<b>B</b>	<b>17.1</b>	<b>C</b>	<b>9.3</b>	<b>A</b>	<b>9.8</b>	<b>A</b>	
7	Main Street & Center Street	#1 & #3 Signalized /	EB	20.2	B	20.5	C	7.3	A	7.4	A	20.0	C	18.3	C	
			WB	19.4	B	20.8	C	N/A				N/A				
		#2 Stop (All-Way)	NB	9.9	A	10.1	B	8.4	A	8.9	A	9.1	A	9.0	A	
			SB	1.1	A	1.9	A	N/A				1.0	A	1.6	A	
		<b>Overall</b>	<b>9.8</b>	<b>A</b>	<b>10.6</b>	<b>B</b>	<b>7.9</b>	<b>A</b>	<b>8.3</b>	<b>A</b>	<b>7.8</b>	<b>A</b>	<b>6.2</b>	<b>A</b>		



Intersection	Control	Approach	Scenario #1 (Pre-COVID)				Scenario #2 (Both Closed)				Scenario #3 (Main Closed)				
			AM Peak		PM Peak		AM Peak		PM Peak		AM Peak		PM Peak		
			Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS	
8	Main Street & Hutton Street	Scenario #1 Signalized / #2 & #3 Stop (All-Way)	EBTL	0.3	A	0.3	A	N/A				N/A			
			EBR	0.0	A	0.0	A	N/A				N/A			
			WBTL	12.8	B	4.6	A	9.6	A	10.2	B	9.5	A	10.2	B
			WBR	13.7	B	5.9	A	10.6	B	16.3	C	10.6	B	16.3	C
			NB	17.2	B	19.1	B	10.6	B	12.1	B	10.3	B	12.1	B
			SBTL	21.6	C	86.3	F	13.2	B	17.6	C	13.1	B	17.6	C
			SBR	16.5	B	16.5	B	8.9	A	10.2	B	8.9	A	10.2	B
		<b>Overall</b>	<b>12.7</b>	<b>B</b>	<b>24.0</b>	<b>C</b>	<b>11.3</b>	<b>B</b>	<b>15.0</b>	<b>B</b>	<b>11.2</b>	<b>B</b>	<b>15.0</b>	<b>B</b>	
9	Main Street & Griswold Street	Signalized	EBTL	12.1	B	25.0	C	9.6	A	10.4	B	9.6	A	10.4	B
			EBTR	10.2	B	18.3	B	9.7	A	10.4	B	9.7	A	10.4	B
			WBTL	10.2	B	12.1	B	10.5	B	11.3	B	10.5	B	11.3	B
			WBTR	10.5	B	12.9	B	10.9	B	12.2	B	10.9	B	12.2	B
			NB	15.6	B	17.5	B	16.6	B	17.8	B	15.9	B	16.8	C
			SB	17.2	B	44.9	D	17.7	B	32.5	C	17.8	B	26.5	C
		<b>Overall</b>	<b>13.1</b>	<b>B</b>	<b>24.1</b>	<b>C</b>	<b>13.5</b>	<b>B</b>	<b>18.4</b>	<b>B</b>	<b>13.3</b>	<b>B</b>	<b>16.3</b>	<b>B</b>	
10	Main Street & Cady Street	Stop (Minor)	EB	Free				Free				Free			
			WBL	7.9	A	8.9	A	8.0	A	8.6	A	8.0	A	8.6	A
			NB	10.0	B	20.3	C	10.6	B	16.8	C	10.6	B	16.8	C
11	Cady Street & Wing Street	Stop (All-Way)	EB	8.5	A	8.9	A	9.5	A	9.9	A	8.3	A	8.6	A
			WB	8.1	A	8.7	A	9.3	A	10.2	B	7.9	A	8.4	A
			NB	8.2	A	9.4	A	9.4	A	11.4	B	8.0	A	8.9	A
			SB	8.9	B	9.5	A	12.1	B	13.0	B	8.6	A	9.0	A
			<b>Overall</b>	<b>8.6</b>	<b>A</b>	<b>9.2</b>	<b>A</b>	<b>10.7</b>	<b>B</b>	<b>11.6</b>	<b>B</b>	<b>8.3</b>	<b>A</b>	<b>8.8</b>	<b>A</b>
12	Cady Street & Center Street	Stop (Minor)	EB	19.9	C	41.3	E	15.2	C	25.3	D	36.7	E	150.3	F
			WB	48.7	E	184.1	F	52.7	F	436.6	F	309.6	F	2200.0	F
			NBL	8.4	A	9.2	A	7.6	A	7.7	A	8.2	A	8.7	A
			SBL	9.1	A	9.0	A	8.2	A	8.5	A	9.1	A	9.3	A
13	Cady Street & Hutton Street	Stop (Minor)	EBL	7.8	A	7.6	A	8.4	A	8.3	A	8.3	A	8.1	A
			WB	Free				Free				Free			
			SB	11.6	B	10.3	B	11.8	B	15.5	C	11.6	B	13.1	B
14	Cady Street & Church Street	Stop (Minor)	EB	Free				Free				Free			
			WB	Free				Free				Free			
			SB	10.4	B	10.0	B	11.8	B	11.8	B	11.6	B	11.1	B
15	Cady Street & Griswold Street	Stop (Minor)	EB	11.7	B	16.1	C	14.1	B	18.4	C	13.3	B	15.7	C
			WB	9.1	A	11.2	B	10.1	B	11.0	B	10.1	B	10.8	B
			NBL	7.4	A	7.6	A	7.7	A	7.9	A	7.7	A	7.8	A
			SBL	7.3	A	7.5	A	7.3	A	7.3	A	7.3	A	7.3	A
16	Beal Street & Griswold Street	Stop (EB & SB)	EB	0.0*	A	0.0*	A	0.0*	A	0.0*	A	0.0*	A	0.0*	A
			WB	Free				Free				Free			
			SB	3.8**	A	3.9**	A	3.8**	A	3.8**	A	3.7**	A	3.9**	A
17	Beal Street & River Street	Stop (Minor)	EB	Free				Free				Free			
			WBL	7.3	A	7.5	A	7.3	A	7.4	A	7.3	A	7.4	A
			NB	9.1	A	9.9	A	9.2	A	9.6	A	9.2	A	9.6	A



Intersection	Control	Approach	Scenario #1 (Pre-COVID)				Scenario #2 (Both Closed)				Scenario #3 (Main Closed)			
			AM Peak		PM Peak		AM Peak		PM Peak		AM Peak		PM Peak	
			Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS
18 Beal Street & Northville Road	Stop (Minor)	EB	10.6	B	13.0	B	9.9	A	11.6	B	9.9	A	11.6	B
		NBL	8.1	A	8.7	A	8.1	A	8.7	A	8.1	A	8.7	A
		SB	Free				Free				Free			
19 Seven Mile Road & First Street / Fairbrook Street	Stop (Minor)	EBL	1.5**	A	11.2**	B	1.3**	A	3.3**	A	3.4**	A	2.5**	A
		WB	Free				Free				Free			
		SB	12.7**	B	29.4**	D	10.6**	B	14.4**	B	10.8**	B	11.3**	B
		SW	10.2**	B	13.2**	B	9.9**	A	6.2**	A	12.8**	B	8.2**	A
20 Fairbrook Street & Wing Street	Stop (All-Way)	EB	7.5	A	8.1	A	8.1	A	8.4	A	7.4	A	8.0	A
		WB	6.8	A	7.9	A	7.4	A	8.1	A	6.7	A	7.7	A
		NB	7.5	A	8.5	A	8.3	A	8.8	A	7.5	A	8.2	A
		SB	7.5	A	8.3	A	8.9	A	9.4	A	7.5	A	8.1	A
		<b>Overall</b>	<b>7.4</b>	<b>A</b>	<b>8.2</b>	<b>A</b>	<b>8.5</b>	<b>A</b>	<b>8.9</b>	<b>A</b>	<b>7.4</b>	<b>A</b>	<b>8.0</b>	<b>A</b>
21 Fairbrook Street & Center Street	Stop (Minor)	EB	23.2	C	24.3	C	14.7	B	14.1	B	18.7	B	19.6	C
		NBL	8.5	A	10.2	B	8.3	A	8.4	A	8.3	A	9.6	A
		SB	Free				Free				Free			
22 Seven Mile Road & Wing Street / St. Lawrence Blvd	Stop (Minor)	EBL	7.8	A	9.3	A	7.9	A	8.9	A	7.8	A	9.0	A
		WBL	8.9	A	8.4	A	8.2	A	8.1	A	8.2	A	8.5	A
		NB	15.5	C	22.5	C	13.3	B	18.1	C	13.0	B	21.4	C
		SB	17.9	C	41.9	E	23.4	C	105.0	F	14.8	B	33.3	D
23 Seven Mile Road & Sheldon Avenue / Center Street	Signalized	EBL	20.7	C	33.5	C	20.5	C	31.4	C	21.6	C	30.4	C
		EBTR	34.1	C	27.0	C	30.0	C	29.0	C	23.5	C	27.7	C
		WBL	38.3	D	40.5	D	40.8	D	53.1	D	27.3	C	39.6	D
		WBT	18.3	B	28.1	C	18.9	B	26.8	C	19.0	B	25.5	C
		WBR	17.4	B	18.5	B	16.8	B	18.0	B	17.2	B	18.2	B
		NBL	20.2	C	43.0	D	22.5	C	21.0	C	18.4	B	31.8	C
		NBTR	22.2	C	28.9	C	16.9	B	19.8	B	19.2	B	22.4	C
		SBL	34.8	C	45.8	D	21.6	C	28.4	C	27.9	C	32.9	C
		SBTR	15.6	B	22.4	C	16.1	B	14.4	B	14.7	B	19.4	B
<b>Overall</b>	<b>24.2</b>	<b>C</b>	<b>28.0</b>	<b>C</b>	<b>21.6</b>	<b>C</b>	<b>24.4</b>	<b>C</b>	<b>19.6</b>	<b>B</b>	<b>24.4</b>	<b>C</b>		
24 Seven Mile Road & Hines Drive	Stop (NB Hines & WBL 7 Mile)	WBL	14.7**	B	22.0**	C	12.4**	B	19.8**	C	5.3**	A	23.1**	C
		WBR	Free				Free				Free			
		NB	17.2**	C	33.3**	D	13.0**	B	35.5**	D	12.1**	B	73.5**	F
		SBL	4.9**	A	4.0**	A	4.0**	A	3.8**	A	3.4**	A	4.2**	A
25 Seven Mile Road & River Street	Stop (Minor)	EBL	7.7	A	8.8	A	7.9	A	8.7	A	7.8	A	8.7	A
		WB	Free				Free				Free			
		SB	11.0	B	13.8	B	10.9	B	14.1	B	10.9	B	14.0	B
26 SB Northville Road & N. Seven Mile Road	Stop/Yield (Minor)	EBT	11.7	B	15.1	C	11.6	B	14.5	B	11.6	B	14.5	B
		EBR	12.4	B	14.3	B	11.0	B	13.9	B	11.0	B	13.9	B
		WB	14.2	B	91.3	F	14.2	B	87.8	F	14.2	B	88.2	F
		SB	Free				Free				Free			
27 NB Northville Road & N. Seven Mile Road	Yield (Minor)	EBL	14.8	B	33.8	D	15.4	C	32.7	D	15.4	C	32.7	D
		NBTL	4.8	A	5.9	A	4.8	A	6.2	A	4.8	A	6.2	A
		NBT	Free				Free				Free			

Intersection	Control	Approach	Scenario #1 (Pre-COVID)				Scenario #2 (Both Closed)				Scenario #3 (Main Closed)				
			AM Peak		PM Peak		AM Peak		PM Peak		AM Peak		PM Peak		
			Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS	
28	Northville Road & S. Seven Mile Road	Signalized	WBL	21.6	C	22.5	C	21.6	C	24.9	C	21.6	C	24.9	C
			WBR	10.0	B	16.0	B	9.6	A	15.4	B	9.6	A	15.4	B
			NBT	41.7	D	142.7	F	53.6	D	120.1	F	53.6	D	120.1	F
			NBTR	60.7	E	144.8	F	71.9	E	123.3	F	71.9	E	123.3	F
			SBL	62.7	E	49.3	D	38.2	D	43.2	D	38.2	D	43.2	D
			SBT	11.3	B	12.3	B	11.4	B	12.1	B	11.4	B	12.1	B
			<b>Overall</b>	<b>39.0</b>	<b>D</b>	<b>63.9</b>	<b>E</b>	<b>37.8</b>	<b>D</b>	<b>54.4</b>	<b>D</b>	<b>37.8</b>	<b>D</b>	<b>54.4</b>	<b>D</b>

\* Indicates no vehicle volume present \*\* Indicates SimTraffic delay was utilized

**Table 4.2: Background Intersection Mitigation Summary**

Additional mitigation measure and/or delays identified with Background conditional are highlighted in green.

Intersection		Scenario #1 (Pre-COVID)	Scenario #2 (Both Closed)	Scenario #3 (Main Closed)
2	Randolph Street & Center Street	<b>Signal Recommended</b> Delays for EB and WB Stop control approaches.	<b>All Way Stop Control Recommended</b> Delays for EB and WB Stop control approaches.	<b>Signal Recommended</b> Delays for EB and WB Stop control approaches.
8	Main Street & Hutton Street	<b>Signal Timing Optimization Recommended</b>	n/a	
9	Main Street & Griswold Street	<b>Signal Timing Optimization Recommended</b>		
12	Cady Street & Center Street	<b>Signal Recommended</b> Delays for EB and WB Stop control approaches.	<b>All Way Stop Control Recommended</b> Delays for EB and WB Stop control approaches.	<b>Signal Recommended</b> Delays for EB and WB Stop control approaches.
22	Seven Mile Road & Wing Street / St. Lawrence	<i>A review of network simulations indicates acceptable operations. Queue lengths were minimal and vehicles were able to find gaps in traffic.</i>		n/a
23	Seven Mile Road & Sheldon Avenue / Center Street	<b>Option 2:</b> Widen the bridge/culvert across the Johnson Creek to provide a NB left-turn lane with 500- ft of storage length. <b>is recommended.</b>	n/a	<b>Option 2:</b> Widen the bridge/culvert across the Johnson Creek to provide a NB left-turn lane with 500- ft of storage length. <b>is recommended.</b>
24	Seven Mile Road & Hines Drive	n/a		<i>Delays on the NB approach are due to impacts/queue lengths extending from Seven Mile Road &amp; Sheldon Avenue / Center Street intersection.</i>
26/27	Northville Road & N. Seven Mile Road	<b>Signal Recommended</b> Delays for WB Stop control approach, northbound left-turn sight distance limitations.		
28	Northville Road & S. Seven Mile Road	<b>Signal Timing Optimization Recommended</b>		

**Table 4.3: Background Conditions with Mitigation Analysis Summary**

Intersection	Control	Approach	Scenario #1 (Pre-COVID)				Scenario #2 (Both Closed)				Scenario #3 (Main Closed)									
			AM Peak		PM Peak		AM Peak		PM Peak		AM Peak		PM Peak							
			Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS						
2 Randolph Street & Center Street	#1 & #3 Signalized / #2 Stop (All-Way)	EB	25.8	C	28.1	C	11.1	B	13.9	B	26.3	C	26.8	C						
		WB	20.8	C	18.3	B	9.8	A	11.3	B	21.7	C	19.2	B						
		NB	1.0	A	1.9	A	15.1	C	30.5	D	1.0	A	2.0	A						
		SB	7.9	A	10.2	B	40.3	E	31.0	D	6.4	A	8.4	A						
		<b>Overall</b>	<b>8.1</b>	<b>A</b>	<b>10.5</b>	<b>B</b>	<b>28.1</b>	<b>D</b>	<b>27.1</b>	<b>D</b>	<b>7.0</b>	<b>A</b>	<b>9.0</b>	<b>A</b>						
8 Main Street & Hutton Street	Scenario #1 Signalized / #2 & #3 Stop (All-Way)	EBTL	No Change				No Change			No Change			No Change							
		EBR													20.9	C				
		WBTL													17.8	B				
		WBR													17.4	B				
		NB													25.1	C				
		SBTL													8.6	A				
		SBR													11.5	B				
		<b>Overall</b>													<b>8.3</b>	<b>A</b>	<b>18.2</b>	<b>B</b>		
9 Main Street & Griswold Street	Signalized	EBTL	No Change			No Change			No Change			No Change								
		EBTR													35.1	D	15.5	B	15.5	B
		WBTL													23.1	C	15.3	B	15.3	B
		WBTR													18.2	B	16.7	B	16.7	B
		NB													20.1	C	18.7	B	18.7	B
		SB													11.8	B	12.0	B	11.5	B
		<b>Overall</b>													<b>19.4</b>	<b>B</b>	<b>20.0</b>	<b>C</b>	<b>15.8</b>	<b>B</b>
12 Cady Street & Center Street	#1 & #3 Signalized / #2 Stop (All-Way)	EB	24.7	C	22.9	C	10.9	B	14.5	B	22.0	C	19.6	B						
		WB	25.9	C	23.7	C	13.7	B	23.6	C	25.2	C	25.1	C						
		NB	5.6	A	6.9	A	16.8	C	45.8	E	7.7	A	10.8	B						
		SB	0.6	A	1.4	A	11.2	B	15.3	C	0.7	A	1.7	A						
		<b>Overall</b>	<b>5.6</b>	<b>A</b>	<b>6.4</b>	<b>A</b>	<b>14.2</b>	<b>B</b>	<b>30.4</b>	<b>D</b>	<b>8.9</b>	<b>A</b>	<b>10.8</b>	<b>B</b>						
26 SB Northville Road & N. Seven Mile Road	Signalized	EBL	31.5	C	26.9	C	31.5	C	26.5	C	31.5	C	26.5	C						
		EBR	14.8	B	13.7	B	13.0	B	13.6	B	13.0	B	13.6	B						
		NBL	3.3	A	9.8	A	3.3	A	9.8	A	3.3	A	9.8	A						
		NBT	0.1	A	0.3	A	0.1	A	0.3	A	0.1	A	0.3	A						
		SB	25.4	C	31.8	C	25.4	C	30.9	C	25.4	C	30.9	C						
		<b>Overall</b>	<b>12.6</b>	<b>B</b>	<b>14.1</b>	<b>B</b>	<b>11.6</b>	<b>B</b>	<b>14.4</b>	<b>B</b>	<b>11.6</b>	<b>B</b>	<b>14.4</b>	<b>B</b>						
28 Northville Road & S. Seven Mile Road	Signalized	WBL	35.2	D	33.5	C	35.2	D	42.4	D	35.2	D	42.4	D						
		WBR	13.2	B	23.9	C	12.7	B	22.8	C	12.7	B	22.8	C						
		NBT	29.6	C	44.5	D	32.7	C	40.4	D	32.7	C	40.4	D						
		NBTR	34.5	C	45.8	D	36.7	D	41.8	D	36.7	D	41.8	D						
		SBL	32.9	C	30.3	C	29.1	C	26.3	C	29.1	C	26.3	C						
		SBT	10.2	B	0.2	A	10.2	B	0.2	A	10.2	B	0.2	A						
		<b>Overall</b>	<b>27.6</b>	<b>C</b>	<b>29.4</b>	<b>C</b>	<b>27.8</b>	<b>C</b>	<b>28.7</b>	<b>C</b>	<b>27.8</b>	<b>C</b>	<b>28.7</b>	<b>C</b>						

**Table 4.4: Scenario 1 - Center St. and Seven Mile Rd. Intersection Mitigation Summary (Background)**

Peak Period	Approach	Existing Conditions				Signalization Improvements				Increased NB LT Storage				Roundabout			
		Delay (s/veh)	LOS	Avg. (ft)	95th % (ft)	Delay (s/veh)	LOS	Avg. (ft)	95th % (ft)	Delay (s/veh)	LOS	Avg. (ft)	95th % (ft)	Delay (s/veh)	LOS	Avg. (ft)	95th % (ft)
AM	EBL	20.7	C	23	59	23.8	C	23	52	20.7	C	19	45	8.7	A	212	407
	EBTR	34.1	C	184	301	52.9	D	207	331	34.1	C	174	289				
	WBL	38.3	D	23	57	29.4	C	23	54	38.3	D	21	56	4.7	A	33	62
	WBT	18.3	B	49	108	28.1	C	65	119	18.3	B	51	105				
	WBR	17.4	B	15	42	23.6	C	14	37	17.4	B	11	34				
	NBL	20.2	B	27	62	21.4	C	28	64	20.2	C	25	62	12.5	B	2004	3555
	NBT	22.2	C	282	505	53.9	D	416	653	19.0	B	218	406				
	NBR									11.3	B	33	68				
	SBL	34.8	C	62	135	30.1	C	46	79	29.1	C	57	130	5.2	A	100	228
	SBTR	15.6	B	127	212	28.4	C	177	278	15.6	B	124	204				
<b>Overall</b>	<b>24.2</b>	<b>C</b>	<b>N/A</b>	<b>N/A</b>	<b>42.4</b>	<b>D</b>	<b>N/A</b>	<b>N/A</b>	<b>22.6</b>	<b>C</b>	<b>N/A</b>	<b>N/A</b>	<b>8.6</b>				
PM	EBL	33.5	C	21	61	32.0	C	24	92	33.5	C	24	64	10.8	B	61	165
	EBTR	27.0	C	151	245	55.9	E	222	355	27.0	C	160	263				
	WBL	40.5	D	77	175	38.2	D	102	251	40.5	D	116	255	9.1	A	262	713
	WBT	28.1	C	180	296	53.7	D	236	372	28.1	C	277	504				
	WBR	18.5	B	64	180	27.7	C	84	221	18.5	B	143	422				
	NBL	43.0	D	51	73	30.9	C	48	74	43.0	D	144	288	18.0	C	4507	8002
	NBT	28.9	C	3384	6126	59.7	E	3472	6322	21.2	C	306	515				
	NBR									11.6	B	38	93				
	SBL	45.8	D	81	187	30.9	C	102	279	33.0	C	87	215	14.9	B	517	535
	SBTR	22.4	C	222	346	39.5	D	374	568	22.4	C	245	387				
<b>Overall</b>	<b>28.0</b>	<b>C</b>	<b>N/A</b>	<b>N/A</b>	<b>48.6</b>	<b>D</b>	<b>N/A</b>	<b>N/A</b>	<b>25.2</b>	<b>C</b>	<b>N/A</b>	<b>N/A</b>	<b>13.5</b>				

**Table 4.5: Scenario 2 - Center St. and Seven Mile Rd. Intersection Mitigation Summary (Background)**

Peak Period	Approach	Existing Conditions				Signalization Improvements				Increased NB LT Storage				Roundabout			
		Delay (s/veh)	LOS	Avg. (ft)	95th % (ft)	Delay (s/veh)	LOS	Avg. (ft)	95th % (ft)	Delay (s/veh)	LOS	Avg. (ft)	95th % (ft)	Delay (s/veh)	LOS	Avg. (ft)	95th % (ft)
AM	EBL	20.5	C	12	36	18.7	B	9	29	20.5	C	9	33	7.0	A	67	125
	EBTR	30.0	C	149	249	33.2	C	178	322	30.0	C	162	278				
	WBL	40.8	D	44	88	21.8	C	40	79	40.8	D	45	105	4.0	A	39	79
	WBT	18.9	B	58	109	20.4	C	54	114	18.9	B	66	135				
	WBR	16.8	B	6	23	16.7	B	7	23	16.8	B	7	22				
	NBL	22.5	C	40	73	22.2	C	34	68	22.5	C	34	82	6.2	A	198	393
	NBT	16.9	B	201	376	31.3	C	234	410	15.1	B	146	275				
	NBR									11.3	B	34	85				
	SBL	21.6	C	19	65	22.1	C	17	48	18.7	B	18	50	5.0	A	71	152
	SBTR	16.1	B	105	188	30.8	C	129	226	16.1	B	104	175				
<b>Overall</b>	<b>21.6</b>	<b>C</b>	<b>N/A</b>	<b>N/A</b>	<b>29.1</b>	<b>C</b>	<b>N/A</b>	<b>N/A</b>	<b>20.9</b>	<b>C</b>	<b>N/A</b>	<b>N/A</b>	<b>5.8</b>				



Peak Period	Approach	Existing Conditions				Signalization Improvements				Increased NB LT Storage				Roundabout			
		Delay (s/veh)	LOS	Avg. (ft)	95th % (ft)	Delay (s/veh)	LOS	Avg. (ft)	95th % (ft)	Delay (s/veh)	LOS	Avg. (ft)	95th % (ft)	Delay (s/veh)	LOS	Avg. (ft)	95th % (ft)
PM	EBL	31.4	C	17	44	25.5	C	18	44	31.4	C	20	54	7.5	A	68	132
	EBTR	29.0	C	163	269	45.0	D	244	370	29.0	C	141	222				
	WBL	53.1	D	115	247	35.3	D	90	207	53.1	D	103	212	5.8	A	155	267
	WBT	26.8	C	210	439	34.8	C	205	346	26.8	C	190	374				
	WBR	18.0	B	96	379	21.7	C	52	203	18.0	B	75	298				
	NBL	21.0	C	45	76	21.0	C	44	73	21.0	C	54	110	8.3	A	783	1355
	NBT	19.8	B	282	497	40.7	D	576	1076	16.4	B	172	328				
	NBR									11.7	B	41	92				
	SBL	28.4	C	39	88	25.0	C	40	73	22.8	C	40	79	6.3	A	128	246
	SBTR	14.4	B	114	189	26.3	C	149	234	14.4	B	112	177				
<b>Overall</b>	<b>24.4</b>	<b>C</b>	<b>N/A</b>	<b>N/A</b>	<b>35.2</b>	<b>D</b>	<b>N/A</b>	<b>N/A</b>	<b>23.2</b>	<b>C</b>	<b>N/A</b>	<b>N/A</b>	<b>7.0</b>	<b>A</b>	<b>N/A</b>	<b>N/A</b>	

**Table 4.6: Scenario 3 - Center St. and Seven Mile Rd. Intersection Mitigation Summary (Background)**

Peak Period	Approach	Existing Conditions				Signalization Improvements				Increased NB LT Storage				Roundabout			
		Delay (s/veh)	LOS	Avg. (ft)	95th % (ft)	Delay (s/veh)	LOS	Avg. (ft)	95th % (ft)	Delay (s/veh)	LOS	Avg. (ft)	95th % (ft)	Delay (s/veh)	LOS	Avg. (ft)	95th % (ft)
AM	EBL	21.6	C	16	47	21.6	C	18	41	21.6	C	24	54	5.7	A	49	82
	EBTR	23.5	C	112	196	31.8	C	141	239	23.5	C	111	182				
	WBL	27.3	C	17	45	23.2	C	14	46	27.3	C	17	42	4.2	A	38	74
	WBT	19.0	B	67	124	26.3	C	85	153	19.0	B	61	115				
	WBR	17.2	B	10	24	21.0	C	16	41	17.2	B	13	39				
	NBL	18.4	B	19	47	15.3	B	33	72	18.4	B	18	48	7.6	A	278	434
	NBT	19.2	B	224	418	28.4	C	282	544	17.1	B	176	318				
	NBR									11.2	B	31	85				
	SBL	27.9	C	40	99	18.6	B	28	57	24.4	C	41	83	4.9	A	69	140
	SBTR	14.7	B	114	197	20.1	C	114	197	14.7	B	110	185				
<b>Overall</b>	<b>19.6</b>	<b>B</b>	<b>N/A</b>	<b>N/A</b>	<b>25.8</b>	<b>C</b>	<b>N/A</b>	<b>N/A</b>	<b>18.5</b>	<b>B</b>	<b>N/A</b>	<b>N/A</b>	<b>5.9</b>	<b>A</b>	<b>N/A</b>	<b>N/A</b>	
PM	EBL	30.4	C	50	166	27.5	C	21	90	30.4	C	20	53	9.6	A	158	354
	EBTR	27.7	C	157	290	48.4	D	227	362	27.7	C	153	253				
	WBL	39.6	D	58	157	30.1	C	68	175	39.6	D	63	139	6.6	A	394	658
	WBT	25.5	C	226	488	37.3	D	193	312	25.5	C	164	251				
	WBR	18.2	B	123	437	24.4	C	57	166	18.2	B	51	136				
	NBL	31.8	C	40	80	24.9	C	48	74	31.8	C	71	147	11.2	B	3036	6667
	NBT	22.4	C	1674	5082	45.9	D	1741	3254	18.5	B	224	376				
	NBR									11.5	B	38	92				
	SBL	32.9	C	46	136	26.2	C	98	280	26.7	C	65	184	9.8	A	524	532
	SBTR	19.4	B	155	313	35.6	D	326	528	19.4	B	208	343				
<b>Overall</b>	<b>24.4</b>	<b>C</b>	<b>N/A</b>	<b>N/A</b>	<b>39.3</b>	<b>D</b>	<b>N/A</b>	<b>N/A</b>	<b>22.9</b>	<b>C</b>	<b>N/A</b>	<b>N/A</b>	<b>9.3</b>	<b>A</b>	<b>N/A</b>	<b>N/A</b>	

## 5 SITE TRIP GENERATION

The number of AM and PM peak hour vehicle trips that would be generated by the proposed development was forecast based on data published by ITE in the *Trip Generation Manual, 11<sup>th</sup> Edition*. The proposed development includes single family, attached housing, multi-family units and commercial uses. The following ITE Trip Generation Manual land uses were determined to be the best fit for the proposed development.

### Single-Family Detached Housing (LUC 210)

- A single-family detached housing site includes any single-family detached home on an individual lot.

### Single-Family Attached Housing (LUC 215)

- Single-family attached housing includes any single-family housing unit that shares a wall with an adjoining dwelling unit, whether the walls are for living space, a vehicle garage, or storage space. Includes duplexes and townhouses/rowhouses, joined side-by-side in a row and each with an outside entrance.

### Mid-Rise Multi-Family Home (LUC 221)

- Mid-rise multifamily housing includes apartments and condominiums located in a building that has between four and 10 floors of living space. Access to individual dwelling units is through an outside building entrance, a lobby, elevator, and a set of hallways.

### Strip Retail Plaza <40k SF (LUC 822)

- A strip retail plaza is an integrated group of commercial establishments that is planned, developed, owned, and managed as a unit. Each study site in this land use has less than 40,000 square feet of gross leasable area (GLA).

Internal trip capture is the portion of trips generated by a mixed-used development that would begin and end within the development; resulting in no additional trips added to the adjacent road network. The internal trip capture spreadsheet for the proposed development is provided in **Appendix A**. Additionally, a portion of the site-generated commercial trips are already present on the adjacent road network and are interrupted to visit the site. These trips are known as “pass-by” trips and result in turning movements at the site driveways, but do not increase traffic volumes on the adjacent road network. The percentage of pass-by trips was determined based on the rates published by in ITE Trip Generation, 11<sup>th</sup> Edition.

**Table 5.1: Trip Generation Summary**

Land Use	ITE Code	Amount	Units	Average Daily Traffic (vpd)	AM Peak Hour (vph)			PM Peak Hour (vph)		
					In	Out	Total	In	Out	Total
Single-Family Detached Housing	210	39	DU	424	8	24	32	26	15	41
Single-Family Attached Housing	215	259	DU	1,923	40	89	129	86	65	151
Multi-Family Home (Mid-Rise)	221	174	DU	784	15	50	65	41	27	68
<b>Total Trips</b>				<b>3,131</b>	<b>63</b>	<b>163</b>	<b>226</b>	<b>153</b>	<b>107</b>	<b>260</b>
<i>Internal Capture</i>				<i>190</i>	<i>1</i>	<i>2</i>	<i>3</i>	<i>14</i>	<i>5</i>	<i>19</i>
<b>New Trips</b>				<b>2,941</b>	<b>62</b>	<b>161</b>	<b>223</b>	<b>139</b>	<b>102</b>	<b>241</b>
Strip Retail Plaza (<40k SF)	822	17,374	SF	963	25	16	41	58	57	115
<i>Internal Capture</i>				<i>190</i>	<i>2</i>	<i>1</i>	<i>3</i>	<i>5</i>	<i>14</i>	<i>19</i>
<i>Pass-By (34%)</i>				<i>327</i>	<i>8</i>	<i>5</i>	<i>13</i>	<i>16</i>	<i>16</i>	<i>32</i>
<b>New Trips</b>				<b>446</b>	<b>15</b>	<b>10</b>	<b>25</b>	<b>37</b>	<b>27</b>	<b>64</b>
<b>Total Trips</b>				<b>4,094</b>	<b>88</b>	<b>179</b>	<b>267</b>	<b>211</b>	<b>164</b>	<b>375</b>
<i>Total Internal Capture</i>				<i>380</i>	<i>3</i>	<i>3</i>	<i>6</i>	<i>19</i>	<i>19</i>	<i>38</i>
<i>Total Pass-By</i>				<i>327</i>	<i>8</i>	<i>5</i>	<i>13</i>	<i>16</i>	<i>16</i>	<i>32</i>
<b>Total New Trips</b>				<b>3,387</b>	<b>77</b>	<b>171</b>	<b>248</b>	<b>176</b>	<b>129</b>	<b>305</b>

## 6 SITE TRIP DISTRIBUTION

The vehicular trips that would be generated by the proposed development were assigned to the study roads based on existing peak hour traffic patterns in the adjacent roadway network and the methodologies published by ITE.

Site Generated Traffic	Scenario 1	Scenario 2	Scenario 3
	Baseline Operations (Pre-COVID)	Main St. & Center St. Closed	Main St. Closed Only
	Figure 6.1	Figure 6.2	Figure 6.3

The adjacent street traffic volumes were used to develop the global traffic distribution. To determine trips distribution for residential developments using the adjacent street traffic it is assumed that the trips in the AM are home-to-work based trips, and in the PM are work-to-home based trips. Therefore, the global trip generation is based on trips in the AM going from the residential development exiting the study network and returning to the study network in the PM. The ITE trip distribution methodology assumes that new trips will return to their direction of origin, while pass-by trips enter and exit the development in their original direction of travel. The global site trip distributions used in the analysis are summarized in **Table 6.1**.

**Table 6.1: Site Generated Traffic Distribution**

New Trips					
Residential		To/From	Via	Commercial	
AM	PM			AM	PM
15%	9%	North	Center Street	13%	13%
2%	2%		Hutton Street	2%	2%
11%	9%		Griswold Street	7%	11%
16%	16%	South	Sheldon Avenue	18%	16%
5%	6%		Hines Drive	3%	5%
14%	16%		Northville Road	16%	15%
19%	18%	East	7-Mile Road	13%	15%
5%	7%	West	Randolph Street	7%	6%
2%	2%		Dunlap Street	2%	2%
2%	4%		Main Street	5%	2%
2%	2%		Cady Street	2%	1%
7%	9%		Seven Mile Road	12%	12%
<b>100%</b>	<b>100%</b>	<b>Total</b>		<b>100%</b>	<b>100%</b>
Commercial Pass-by Trips					
From / To		Via	AM	PM	
North to South		Center Street	43%	40%	
South to North		Center Street	30%	36%	
East to West		Cady Street	13%	13%	
West to East		Cady Street	14%	11%	
Total			100%	100%	

The vehicular traffic volumes shown in **Table 6.1** were distributed to the roadway network according to the global traffic distribution shown in **Table 7.1**. The proposed development plan has multiple site access points to the adjacent roadway network; therefore, the impact of the development is dispersed throughout the area study intersections. Additionally, the trips were routed to the roadway network based on the available roadway connectively associated with each of the roadway scenarios. For example, vehicles traveling from the site north on Center Street in Scenario 2 would utilize the detour route around the Center Street closure. The site generated traffic is shown on Figures 6.1, 6.2, and 6.3 for Scenarios 1, 2 and 3 respectively.

## 7 FUTURE CONDITIONS (2028)

The future conditions analysis evaluated the projected operations in 2028 *with the proposed development* for the three (3) scenarios as summarized below.

Section 7	Section 7.1	Section 7.2	Section 7.3
<b>Future Conditions</b>	<b>Scenario 1</b> <i>Baseline Operations (Pre-COVID)</i>	<b>Scenario 2</b> <i>Main St. &amp; Center St. Closed</i>	<b>Scenario 3</b> <i>Main St. Closed Only</i>
<b>Future Traffic Volumes</b>	Background Conditions + Site Generated Traffic	Background Conditions + Site Generated Traffic	Background Conditions + Site Generated Traffic

### 7.1 SCENARIO 1 - BASELINE OPERATIONS (PRE-COVID)

The traffic volumes for this analysis utilized the site generated traffic volumes shown on Figure 6.1 which were added to the background 2028 traffic volumes shown on Figure 4.1 to calculate the future Scenario 1 traffic volumes shown on Figure 7.1. The results of the Scenario 1 future conditions analysis were based on the lane use and traffic control shown on **Figure 2.1** the traffic volumes shown on **Figure 7.1 in Appendix D**.

### 7.2 SCENARIO 2 - MAIN ST. & CENTER ST. CLOSED

The traffic volumes for this analysis utilized the site generated traffic volumes shown on Figure 6.2 which were added to the background 2028 traffic volumes shown on Figure 4.2 to calculate the future Scenario 1 traffic volumes shown on Figure 7.2. The results of the Scenario 1 future conditions analysis were based on the lane use and traffic control shown on **Figure 2.1** the traffic volumes shown on **Figure 7.2 in Appendix D**.

### 7.3 SCENARIO 3 - MAIN ST. CLOSED ONLY

The traffic volumes for this analysis utilized the site generated traffic volumes shown on Figure 6.3 which were added to the background 2028 traffic volumes shown on Figure 4.3 to calculate the future Scenario 1 traffic volumes shown on Figure 7.3. The results of the Scenario 1 future conditions analysis were based on the lane use and traffic control shown on **Figure 2.1** and the traffic volumes shown on **Figure 7.3 in Appendix D**.

### 7.4 FUTURE CONDITIONS ANALYSIS SUMMARY

The results of the future conditions analysis summarized in **Table 7.1** and are presented in **Appendix D**. The results of the background conditions analysis indicate that all study intersection approaches and movements are expected to operate similar to background conditions with the following additional delays, highlighted in Table 7.1.

In order to improve traffic operations to a LOS D or better for all intersection approaches and movements in the future condition scenarios, the mitigation measures evaluated in the existing and background conditions analyses were investigated in addition to mitigation measures identified as necessary to accommodate the projected site traffic volumes. The recommended mitigation measures are summarized in **Table 7.2** and the results of the analysis with the recommendations is summarized in **Table 7.3**.

**Table 7.1: Future Conditions Analysis Summary**

Intersection	Control	Approach	Scenario #1 (Pre-COVID)				Scenario #2 (Both Closed)				Scenario #3 (Main Closed)				
			AM Peak		PM Peak		AM Peak		PM Peak		AM Peak		PM Peak		
			Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS	
1	Randolph Street & Wing Street	Stop (Minor)	EB	Free				Free				Free			
			WBL	7.8	A	8.3	A	7.7	A	8.2	A	7.7	A	8.2	A
			NB	12.2	B	21.0	C	11.3	B	18.3	C	11.6	B	17.0	C
2	Randolph Street & Center Street	Stop (Minor)	EB	48.3	E	367.5	F	20.5	C	44.7	E	31.4	D	237.6	F
			WB	39.7	E	257.3	F	19.8	C	29.9	D	34.5	D	122.4	F
			NBL	9.4	A	9.5	A	8.9	A	8.6	A	9.1	A	9.2	A
			SBL	8.6	A	9.2	A	8.1	A	8.5	A	8.8	A	9.3	A



Intersection	Control	Approach	Scenario #1 (Pre-COVID)				Scenario #2 (Both Closed)				Scenario #3 (Main Closed)				
			AM Peak		PM Peak		AM Peak		PM Peak		AM Peak		PM Peak		
			Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS	
3	Dunlap Street & Wing Street	Stop (All-Way)	EB	8.7	A	10.1	B	10.3	B	13.1	B	8.5	A	9.6	A
			WB	9.2	A	13.0	B	17.4	C	31.6	D	8.9	A	11.7	B
			NB	8.7	A	12.0	B	13.5	B	33.5	D	8.5	A	11.0	B
			SB	9.0	A	10.7	B	11.2	B	16.5	C	8.9	B	10.1	B
			<b>Overall</b>	<b>8.9</b>	<b>A</b>	<b>11.8</b>	<b>B</b>	<b>14.4</b>	<b>B</b>	<b>27.7</b>	<b>D</b>	<b>8.7</b>	<b>A</b>	<b>10.9</b>	<b>B</b>
4	Center Street & Dunlap Street	Scenario #1 Signalized / Scenario #2 Stop (All-Way) / Scenario #3 Signalized	EBL	22.1	C	26.4	C	16.3	C	20.6	C	27.5	C	47.8	D
			EBTR	18.9	B	19.5	B	10.0	B	11.8	B	18.7	B	20.1	C
			WBL	19.2	B	17.6	B	N/A				19.0	B	20.2	C
			WBTR	20.4	C	21.5	C	12.8	B	22.6	C	24.3	C	52.7	D
			NBL	1.7	A	4.0	A	N/A				1.2	A	2.7	A
			NBTR	1.4	A	2.2	A	N/A				1.2	A	1.3	A
			SBL	6.6	A	6.3	A	16.0	C	22.9	C	6.2	A	6.0	A
			SBTR	8.2	A	10.6	B	14.1	B	14.9	B	7.5	A	9.2	A
<b>Overall</b>	<b>7.9</b>	<b>A</b>	<b>9.9</b>	<b>A</b>	<b>14.5</b>	<b>B</b>	<b>19.8</b>	<b>C</b>	<b>9.5</b>	<b>A</b>	<b>17.7</b>	<b>B</b>			
5	Dunlap Street & Hutton Street	Stop (Minor)	EBL	7.7	A	8.2	A	8.1	A	8.7	A	8.0	A	8.7	A
			WB	Free				Free				Free			
			SB	11.0	B	15.0	C	14.5	B	23.5	C	14.1	B	23.3	C
6	Main Street & Wing Street	Stop (All-Way)	EB	10.2	B	11.6	B	12.2	B	14.8	B	9.9	A	10.4	A
			WB	9.1	A	10.4	B	10.4	B	13.8	B	8.6	A	9.0	A
			NB	9.0	A	11.8	B	11.2	B	20.5	C	8.8	A	10.2	B
			SB	10.1	B	10.8	B	16.5	C	22.1	C	9.5	A	9.6	A
			<b>Overall</b>	<b>9.8</b>	<b>A</b>	<b>11.2</b>	<b>B</b>	<b>13.6</b>	<b>B</b>	<b>18.8</b>	<b>C</b>	<b>9.4</b>	<b>A</b>	<b>10.0</b>	<b>A</b>
7	Main Street & Center Street	#1 & #3 Signalized / #2 Stop (All-Way)	EB	20.2	B	20.7	C	7.4	A	7.6	A	20.1	C	18.4	C
			WB	19.5	B	21.0	C	N/A				N/A			
			NB	10.2	B	10.4	B	8.6	A	9.2	A	9.3	A	9.2	A
			SB	1.2	A	2.0	A	N/A				1.0	A	1.7	A
			<b>Overall</b>	<b>9.9</b>	<b>A</b>	<b>10.7</b>	<b>B</b>	<b>8.0</b>	<b>A</b>	<b>8.6</b>	<b>A</b>	<b>7.9</b>	<b>A</b>	<b>6.4</b>	<b>A</b>
8	Main Street & Hutton Street	Scenario #1 Signalized / #2 & #3 Stop (All-Way)	EBTL	0.3	A	0.3	A	N/A				N/A			
			EBR	0.0	A	0.1	A	N/A				N/A			
			WBTL	12.8	B	4.6	A	9.7	A	10.5	B	9.6	A	10.4	B
			WBR	13.7	B	5.9	A	11.0	B	16.9	C	10.9	B	16.8	C
			NB	17.6	B	19.8	B	11.4	B	12.7	B	10.8	B	12.6	B
			SBTL	21.8	C	106.8	F	13.6	B	18.1	C	13.4	B	17.9	C
			SBR	16.5	B	16.5	B	9.1	A	10.7	B	9.1	A	10.5	B
			<b>Overall</b>	<b>12.9</b>	<b>B</b>	<b>29.7</b>	<b>C</b>	<b>11.7</b>	<b>B</b>	<b>15.4</b>	<b>C</b>	<b>11.5</b>	<b>B</b>	<b>15.3</b>	<b>C</b>
9	Main Street & Griswold Street	Signalized	EBTL	12.1	B	25.1	C	9.6	A	10.4	B	9.6	A	10.4	B
			EBTR	10.2	B	18.3	B	9.7	A	10.4	B	9.7	A	10.4	B
			WBTL	10.2	B	12.1	B	10.5	B	11.3	B	10.5	B	11.3	B
			WBTR	10.5	B	12.9	B	10.9	B	12.2	B	10.9	B	12.2	B
			NB	15.9	B	17.8	B	17.0	B	18.1	B	16.4	B	17.1	C
			SB	17.3	B	51.9	D	17.9	B	35.8	D	18.0	B	28.4	C
			<b>Overall</b>	<b>13.2</b>	<b>B</b>	<b>26.3</b>	<b>C</b>	<b>13.7</b>	<b>B</b>	<b>19.5</b>	<b>B</b>	<b>13.5</b>	<b>B</b>	<b>17.0</b>	<b>B</b>

Intersection	Control	Approach	Scenario #1 (Pre-COVID)				Scenario #2 (Both Closed)				Scenario #3 (Main Closed)			
			AM Peak		PM Peak		AM Peak		PM Peak		AM Peak		PM Peak	
			Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS
10 Main Street & Cady Street	Stop (Minor)	EB	Free				Free				Free			
		WBL	7.9	A	8.9	A	8.0	A	8.6	A	8.0	A	8.6	A
		NB	10.0	B	20.3	C	10.6	B	16.8	C	10.6	B	16.8	C
11 Cady Street & Wing Street	Stop (All-Way)	EB	8.5	A	9.0	A	9.6	A	10.0	A	8.3	A	8.6	A
		WB	8.1	A	8.7	A	9.4	A	10.2	B	7.9	A	8.4	A
		NB	8.2	A	9.4	A	9.5	A	11.5	B	8.0	A	9.0	A
		SB	8.9	B	9.5	A	12.2	B	13.1	B	8.6	A	9.1	A
		<b>Overall</b>	<b>8.6</b>	<b>A</b>	<b>9.2</b>	<b>A</b>	<b>10.8</b>	<b>B</b>	<b>11.7</b>	<b>B</b>	<b>8.3</b>	<b>A</b>	<b>8.8</b>	<b>A</b>
12 Cady Street & Center Street	Stop (Minor)	EB	21.6	C	47.7	E	15.9	C	29.0	D	41.7	E	216.5	F
		WB	58.4	F	258.2	F	67.5	F	564.0	F	410.3	F	3867.1	F
		NBL	8.4	A	9.3	A	7.6	A	7.8	A	8.3	A	8.8	A
		SBL	9.2	A	9.1	A	8.3	A	8.6	A	9.2	A	9.4	A
13 Cady Street & Hutton Street / N. Site Drive	Stop (Minor)	EBL	7.8	A	7.6	A	8.4	A	8.4	A	8.3	A	8.1	A
		WBL	7.6	A	7.5	A	7.6	A	7.8	A	7.6	A	7.7	A
		NB	12.1	B	11.8	B	19.7	C	27.3	D	16.1	C	19.1	C
		SB	12.9	B	11.9	B	14.3	B	26.8	D	12.9	B	16.3	C
14 Cady Street & Church Street	Stop (Minor)	EB	Free				Free				Free			
		WB	Free				Free				Free			
		SB	10.5	B	10.0	B	12.0	B	11.9	B	11.8	B	11.2	B
15 Cady Street & Griswold Street	Stop (Minor)	EB	12.2	B	17.3	C	15.1	C	19.8	C	14.2	B	16.8	C
		WB	9.1	A	11.4	B	10.3	B	11.2	B	10.2	B	11.0	B
		NBL	7.4	A	7.6	A	7.7	A	7.9	A	7.7	A	7.8	A
		SBL	7.3	A	7.5	A	7.4	A	7.4	A	7.4	A	7.4	A
16 Beal Street & Griswold Street	Stop (EB & SB)	EB	4.9**	A	4.8**	A	5.0**	A	5.1**	A	4.8**	A	4.9**	A
		WB	Free				Free				Free			
		SB	4.1**	A	4.2**	A	3.9**	A	4.2**	A	3.8**	A	4.2**	A
17 Beal Street & River Street	Stop (Minor)	EB	Free				Free				Free			
		WBL	7.5	A	7.6	A	7.5	A	7.5	A	7.5	A	7.5	A
		NB	9.7	A	10.7	B	9.6	A	10.3	B	9.6	A	10.3	B
18 Beal Street & Northville Road	Stop (Minor)	EB	10.7	B	13.3	B	9.9	A	11.9	B	9.9	A	11.9	B
		NBL	8.1	A	8.9	A	8.1	A	8.8	A	8.1	A	8.8	A
		SB	Free				Free				Free			
19 Seven Mile Road & First Street / Fairbrook	Stop (Minor)	EBL	1.8**	A	3.6**	A	2.2**	A	1.2**	A	1.6**	A	1.8**	A
		WB	Free				Free				Free			
		SB	14.5**	B	29.6**	D	14.6**	B	10.8**	B	6.2**	A	12.4**	B
		SW	6.4**	A	11.8**	B	9.9**	A	6.8**	A	8.9**	A	9.4**	A

Intersection	Control	Approach	Scenario #1 (Pre-COVID)				Scenario #2 (Both Closed)				Scenario #3 (Main Closed)			
			AM Peak		PM Peak		AM Peak		PM Peak		AM Peak		PM Peak	
			Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS
20 Fairbrook Street & Wing Street	Stop (All-Way)	EB	7.5	A	8.3	A	8.2	A	8.6	A	7.5	A	8.1	A
		WB	7.0	A	8.1	A	7.6	A	8.2	A	6.9	A	7.8	A
		NB	7.6	A	8.6	A	8.4	A	8.9	A	7.5	A	8.3	A
		SB	7.6	A	8.4	A	9.1	A	9.5	A	7.5	A	8.2	A
		<b>Overall</b>	<b>7.5</b>	<b>A</b>	<b>8.4</b>	<b>A</b>	<b>8.6</b>	<b>A</b>	<b>9.0</b>	<b>A</b>	<b>7.4</b>	<b>A</b>	<b>8.1</b>	<b>A</b>
21 Fairbrook Street & Center Street	Stop (Minor)	EB	33.6	D	133.2	F	17.7	C	24.7	C	24.5	C	62.2	F
		WB	37.3	E	134.8	F	23.2	C	30.1	D	28.2	D	68.1	F
		NBL	8.6	A	10.3	B	8.4	A	8.5	A	8.4	A	9.7	A
		SBL	9.4	A	9.5	A	8.3	A	8.7	A	9.1	A	9.1	A
22 Seven Mile Road & Wing Street / St. Lawrence Blvd	Stop (Minor)	EBL	7.8	A	9.3	A	7.9	A	9.0	A	7.9	A	9.0	A
		WBL	8.9	A	8.4	A	8.2	A	8.1	A	8.2	A	8.5	A
		NB	15.6	C	22.9	C	13.4	B	18.3	C	13.1	B	21.7	C
		SB	18.4	C	44.4	E	24.1	C	114.7	F	15.1	C	34.8	D
23 Seven Mile Road & Sheldon Avenue / Center Street	Signalized	EBL	20.8	C	33.8	C	20.6	C	31.7	C	21.7	C	30.7	C
		EBTR	34.3	C	27.1	C	30.2	C	29.1	C	23.5	C	27.8	C
		WBL	38.4	D	40.9	D	41.1	D	54.0	D	27.4	C	39.9	D
		WBT	18.3	B	28.4	C	18.9	B	27.0	C	19.0	B	25.6	C
		WBR	17.6	B	19.0	B	17.0	B	18.5	B	17.4	B	18.7	B
		NBL	21.5	C	47.4	D	24.4	C	22.0	C	19.5	B	33.9	C
		NBTR	22.9	C	32.0	C	17.2	B	20.8	C	19.7	B	23.8	C
		SBL	38.3	D	53.7	D	22.8	C	30.9	C	30.0	C	36.1	D
		SBTR	16.2	B	23.7	C	16.9	B	14.8	B	15.3	B	20.2	C
		<b>Overall</b>	<b>24.6</b>	<b>C</b>	<b>29.5</b>	<b>C</b>	<b>21.9</b>	<b>C</b>	<b>24.8</b>	<b>C</b>	<b>20.0</b>	<b>B</b>	<b>25.1</b>	<b>C</b>
24 Seven Mile Road & Hines Drive	Stop (NB Hines & WBL 7 Mile)	WBL	20.2**	C	21.8**	C	8.4**	A	21.5**	C	12.8**	B	43.0**	E
		WBR	Free				Free				Free			
		NB	18.5**	C	49.8**	E	14.4**	B	30.3**	D	15.0**	C	95.1**	F
		SBL	5.1**	A	4.0**	A	3.6**	A	3.7**	A	3.9**	A	4.3**	A
25 Seven Mile Road & River Street	Stop (Minor)	EBL	7.8	A	8.9	A	7.8	A	8.8	A	7.8	A	8.8	A
		WB	Free				Free				Free			
		SB	12.0	B	15.7	C	11.8	B	15.8	C	11.8	B	15.9	C
26 SB Northville Road & N. Seven Mile Road	Stop/Yield (Minor)	EBT	12.1	B	15.6	C	12.0	B	15.0	B	12.0	B	15.0	B
		EBR	13.2	B	15.0	C	11.5	B	14.6	B	11.5	B	14.6	B
		WB	15.4	C	135.0	F	15.4	C	130.8	F	15.4	C	131.4	F
		SB	Free				Free				Free			
27 NB Northville Road & N. Seven Mile Road	Yield (Minor)	EBL	15.5	C	41.0	E	16.2	C	38.1	E	16.2	C	38.1	E
		NBTL	4.9	A	6.0	A	4.9	A	6.3	A	4.9	A	6.3	A
		NBT	Free				Free				Free			

Intersection	Control	Approach	Scenario #1 (Pre-COVID)				Scenario #2 (Both Closed)				Scenario #3 (Main Closed)				
			AM Peak		PM Peak		AM Peak		PM Peak		AM Peak		PM Peak		
			Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS	
28	Northville Road & S. Seven Mile Road	Signalized	WBL	21.6	C	22.5	C	21.6	C	24.9	C	21.6	C	24.9	C
			WBR	10.2	B	16.9	B	9.8	A	16.4	B	9.8	A	16.4	B
			NBT	43.6	D	157.3	F	58.4	E	133.4	F	58.4	E	133.4	F
			NBTR	60.7	E	158.9	F	71.9	E	136.1	F	71.9	E	136.1	F
			SBL	82.4	F	56.4	E	43.8	D	47.9	D	43.8	D	47.9	D
			SBT	11.4	B	12.4	B	11.5	B	12.2	B	11.5	B	12.2	B
			<b>Overall</b>	<b>44.3</b>	<b>D</b>	<b>69.7</b>	<b>E</b>	<b>39.4</b>	<b>D</b>	<b>59.2</b>	<b>E</b>	<b>39.4</b>	<b>D</b>	<b>59.2</b>	<b>D</b>
29	Cady Street & N.E. Site Dr.	Stop (Minor)	EB	Free				Free				Free			
			WBL	Free				Free				Free			
			NB	10.7	B	9.8	A	11.6	B	11.3	B	11.3	B	10.7	B
30	Griswold Street & E. Site Dr.	Stop (Minor)	EB	9.0	A	9.7	A	8.9	A	9.3	A	8.9	A	9.3	A
			NBL	7.3	A	7.5	A	7.3	A	7.4	A	7.3	A	7.5	A
			SB	Free				Free				Free			
31	Griswold Street & S.E. Site Dr.	Stop (Minor)	EB	9.2	A	9.5	A	9.3	A	9.1	A	9.3	A	9.2	A
			NBL	0.0*	A	7.5	A	0.0*	A	7.4	A	0.0*	A	7.5	A
			SB	Free				Free				Free			
32	Center Street & Proposed Beal St.	Stop (Minor)	WB	27.3	D	41.1	E	17.8	C	20.0	C	23.3	C	32.6	D
			NB	Free				Free				Free			
			SBL	9.5	A	9.5	A	8.4	A	8.8	A	9.0	A	9.3	A
33	Fairbrook Street & S.W. Site Dr.	Stop (Minor)	EB	Free				Free				Free			
			WBL	7.3	A	7.4	A	7.4	A	7.5	A	7.3	A	7.5	A
			NB	8.5	A	8.7	A	8.8	A	9.2	A	8.5	A	8.8	A
34	Wing Street & S.W. Site Dr.	Stop (Minor)	WB	8.9	A	9.8	A	9.7	A	10.8	B	8.9	A	9.6	A
			NB	Free				Free				Free			
			SBL	0.0*	A	7.5	A	0.0*	A	0.0*	A	0.0*	A	0.0*	A

\* Indicates no vehicle volume present \*\* Indicates SimTraffic delay was utilized

**Table 7.2: Future Intersection Mitigation Summary**

Mitigation measures and delays recommended for Background conditions are highlighted in green and additional delays and/mitigation measures identified with Future conditions are highlighted in blue.

Intersection		Scenario #1 (Pre-COVID)	Scenario #2 (Both Closed)	Scenario #3 (Main Closed)
2	Randolph Street & Center Street	<b>Signal Recommended</b> Delays for EB and WB Stop control approaches.	<b>All Way Stop Control Recommended</b> Delays for EB and WB Stop control approaches.	<b>Signal Recommended</b> Delays for EB and WB Stop control approaches.
8	Main Street & Hutton Street	<b>Signal Timing Optimization Recommended</b>	n/a	
9	Main Street & Griswold Street	<b>Signal Timing Optimization Recommended</b>		
12	Cady Street & Center Street	<b>Signal Recommended</b> Delays for EB and WB Stop control approaches.	<b>All Way Stop Control Recommended</b> Delays for EB and WB Stop control approaches.	<b>Signal Recommended</b> Delays for EB and WB Stop control approaches.
21	Fairbrook Street & Center Street	<i>A review of network simulations indicates acceptable operations. Queue lengths were minimal and vehicles were able to find gaps in traffic.</i>	n/a	<i>A review of network simulations indicates acceptable operations. Queue lengths were minimal and vehicles were able to find gaps in traffic.</i>
22	Seven Mile Road & Wing Street / St. Lawrence	<i>A review of network simulations indicates acceptable operations. Queue lengths were minimal and vehicles were able to find gaps in traffic.</i>		n/a
23	Seven Mile Road & Sheldon Avenue / Center Street	<b>Option 2:</b> Widen the bridge/culvert across the Johnson Creek to provide a NB left-turn lane with 500- ft of storage length. <b>is recommended.</b>	n/a	<b>Option 2:</b> Widen the bridge/culvert across the Johnson Creek to provide a NB left-turn lane with 500- ft of storage length. <b>is recommended.</b>
24	Seven Mile Road & Hines Drive	<i>Delays on the NB approach are due to impacts/queue lengths extending from Seven Mile Road &amp; Sheldon Avenue / Center Street intersection.</i>	n/a	<i>Delays on the WB and NB approach are due to impacts/queue lengths extending from Seven Mile Road &amp; Sheldon Avenue / Center Street intersection.</i>
26/ 27	Northville Road & N. Seven Mile Road	<b>Signal Recommended</b> Delays for WB Stop control approach, northbound left-turn sight distance limitations.		
28	Northville Road & S. Seven Mile Road	<b>Signal Timing Optimization Recommended</b>		
32	Center Street & Proposed Beal Street	<i>A review of network simulations indicates acceptable operations. Queue lengths were minimal and vehicles were able to find gaps in traffic.</i>	n/a	n/a



**Table 7.3: Future Conditions with Mitigation Analysis Summary**

Intersection	Control	Approach	Scenario #1 (Pre-COVID)				Scenario #2 (Both Closed)				Scenario #3 (Main Closed)							
			AM Peak		PM Peak		AM Peak		PM Peak		AM Peak		PM Peak					
			Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS	Delay (s/veh)	LOS				
2 Randolph Street & Center Street	#1 & #3 Signalized / #2 Stop (All-Way)	EB	25.8	C	28.4	C	11.4	B	14.5	B	26.3	C	27.1	C				
		WB	20.8	C	18.2	B	10.0	A	11.6	B	21.6	C	19.0	B				
		NB	1.1	A	2.0	A	16.6	C	35.0	D	1.1	A	2.1	A				
		SB	8.1	A	10.7	B	47.5	E	37.6	E	6.6	A	8.9	A				
		<b>Overall</b>	<b>8.1</b>	<b>A</b>	<b>10.8</b>	<b>B</b>	<b>32.3</b>	<b>D</b>	<b>31.6</b>	<b>D</b>	<b>7.0</b>	<b>A</b>	<b>9.4</b>	<b>A</b>				
8 Main Street & Hutton Street	Scenario #1 Signalized / #2 & #3 Stop (All-Way)	EBTL	No Change		20.9	C	No Change			No Change								
		EBR			18.0	B												
		WBTL			17.4	B												
		WBR			25.1	C												
		NB			8.7	A												
		SBTL			11.8	B												
		SBR			8.3	A												
		<b>Overall</b>			<b>18.0</b>	<b>B</b>												
9 Main Street & Griswold Street	Signalized	EBTL	No Change		35.3	D	No Change			No Change								
		EBTR			23.1	C									15.6	B	15.3	B
		WBTL			18.2	B									16.7	B	16.7	B
		WBTR			20.1	C									18.7	B	18.7	B
		NB			12.0	B									12.2	B	11.7	B
		SB			20.4	C									17.3	B	15.8	B
		<b>Overall</b>			<b>20.3</b>	<b>C</b>									<b>16.0</b>	<b>B</b>	<b>15.6</b>	<b>B</b>
12 Cady Street & Center Street	#1 & #3 Signalized / #2 Stop (All-Way)	EB	24.7	C	22.9	C	11.2	B	15.5	C	21.7	C	19.5	B				
		WB	25.9	C	23.8	C	14.2	B	26.9	D	25.1	C	25.7	C				
		NB	5.8	A	7.1	A	18.5	C	59.8	F	8.2	A	11.3	B				
		SB	0.6	A	1.5	A	11.6	B	17.2	C	0.8	A	1.9	A				
		<b>Overall</b>	<b>5.8</b>	<b>A</b>	<b>6.6</b>	<b>A</b>	<b>15.2</b>	<b>C</b>	<b>37.4</b>	<b>E</b>	<b>9.2</b>	<b>A</b>	<b>11.2</b>	<b>B</b>				
26 SB Northville Road & N. Seven Mile Road	Signalized	EBL	32.7	C	37.1	D	32.8	C	35.9	D	32.8	C	35.9	D				
		EBR	16.0	B	16.9	B	13.9	B	16.8	B	13.9	B	16.8	B				
		NBL	3.2	A	5.7	A	3.2	A	5.7	A	3.2	A	5.7	A				
		NBT	0.1	A	0.3	A	0.1	A	0.2	A	0.1	A	0.2	A				
		SB	25.0	C	26.4	C	25.0	C	25.8	C	25.0	C	25.8	C				
		<b>Overall</b>	<b>13.0</b>	<b>B</b>	<b>12.4</b>	<b>B</b>	<b>12.0</b>	<b>B</b>	<b>12.6</b>	<b>B</b>	<b>12.0</b>	<b>B</b>	<b>12.6</b>	<b>B</b>				
28 Northville Road & S. Seven Mile Road	Signalized	WBL	35.2	D	33.5	C	35.2	D	42.4	D	35.2	D	42.4	D				
		WBR	13.4	B	26.0	C	12.9	B	24.7	C	12.9	B	24.7	C				
		NBT	30.1	C	47.7	D	33.7	C	42.7	D	33.7	C	42.7	D				
		NBTR	34.5	C	49.0	D	36.7	D	44.1	D	36.7	D	44.1	D				
		SBL	35.4	D	40.4	D	30.7	C	34.7	C	30.7	C	34.7	C				
		SBT	10.3	B	4.3	A	10.3	B	4.2	A	10.3	B	4.2	A				
		<b>Overall</b>	<b>28.1</b>	<b>C</b>	<b>33.0</b>	<b>C</b>	<b>28.1</b>	<b>C</b>	<b>31.6</b>	<b>C</b>	<b>28.1</b>	<b>C</b>	<b>31.6</b>	<b>C</b>				

**Table 7.4: Scenario 1 - Center St. and Seven Mile Rd. Intersection Mitigation Summary (Future)**

Peak Period	Approach	Existing Conditions				Signalization Improvements				Increased NB LT Storage				Roundabout			
		Delay (s/veh)	LOS	Avg. (ft)	95th % (ft)	Delay (s/veh)	LOS	Avg. (ft)	95th % (ft)	Delay (s/veh)	LOS	Avg. (ft)	95th % (ft)	Delay (s/veh)	LOS	Avg. (ft)	95th % (ft)
AM	EBL	20.8	C	22	50	23.9	C	24	54	20.8	C	26	84	9.3	A	219	435
	EBTR	34.3	C	191	306	53.6	D	209	365	34.3	C	195	327				
	WBL	38.4	D	21	52	29.6	C	20	46	38.4	D	21	53	5.1	A	35	78
	WBT	18.3	B	49	99	28.3	C	52	117	18.3	B	49	102				
	WBR	17.6	B	17	47	23.8	C	14	38	17.6	B	14	44				
	NBL	21.5	B	27	63	22.1	C	18	43	21.5	C	19	48	13.8	B	2174	3787
	NBT	22.9	C	301	527	54.9	D	466	831	19.4	B	225	421				
	NBR									11.3	B	33	88				
	SBL	38.3	D	81	161	33.7	C	61	108	31.4	C	64	129	5.6	A	144	308
	SBTR	16.2	B	127	235	29.8	C	144	234	16.2	B	135	229				
<b>Overall</b>	<b>24.6</b>	<b>C</b>	<b>N/A</b>	<b>N/A</b>	<b>43.0</b>	<b>D</b>	<b>N/A</b>	<b>N/A</b>	<b>23.0</b>	<b>C</b>	<b>N/A</b>	<b>N/A</b>	<b>9.2</b>				
PM	EBL	33.8	C	21	50	31.6	C	25	95	33.8	C	37	94	11.4	B	112	271
	EBTR	27.1	C	150	237	54.1	D	213	331	27.1	C	158	267				
	WBL	40.9	D	80	182	37.4	D	90	235	40.9	D	110	239	10.7	B	422	774
	WBT	28.4	C	193	308	52.3	D	252	420	28.4	C	216	387				
	WBR	19.0	B	65	182	27.7	C	121	318	19.0	B	100	293				
	NBL	47.4	D	53	73	36.7	D	46	73	47.4	D	219	479	22.2	C	5215	9441
	NBT	32.0	C	3986	7609	72.9	F	3639	6264	22.4	C	361	650				
	NBR									11.6	B	44	99				
	SBL	53.7	D	94	207	33.7	C	109	294	36.4	D	113	250	17.1	C	444	744
	SBTR	23.7	C	250	407	45.0	D	355	557	23.7	C	241	381				
<b>Overall</b>	<b>29.5</b>	<b>C</b>	<b>N/A</b>	<b>N/A</b>	<b>53.1</b>	<b>D</b>	<b>N/A</b>	<b>N/A</b>	<b>26.1</b>	<b>C</b>	<b>N/A</b>	<b>N/A</b>	<b>15.8</b>				

**Table 7.5: Scenario 2 - Center St. and Seven Mile Rd. Intersection Mitigation Summary (Future)**

Peak Period	Approach	Existing Conditions				Signalization Improvements				Increased NB LT Storage				Roundabout			
		Delay (s/veh)	LOS	Avg. (ft)	95th % (ft)	Delay (s/veh)	LOS	Avg. (ft)	95th % (ft)	Delay (s/veh)	LOS	Avg. (ft)	95th % (ft)	Delay (s/veh)	LOS	Avg. (ft)	95th % (ft)
AM	EBL	20.6	C	7	26	19.6	B	10	30	20.6	C	8	28	7.4	A	64	139
	EBTR	30.2	C	143	247	35.7	D	159	273	30.2	C	164	281				
	WBL	41.1	D	45	92	23.1	C	38	78	41.1	D	52	115	4.0	A	38	76
	WBT	18.9	B	62	119	21.5	C	62	126	18.9	B	67	142				
	WBR	17.0	B	10	33	17.3	B	13	46	17.0	B	10	36				
	NBL	24.4	C	40	76	23.1	C	38	67	24.4	C	39	86	6.4	A	150	284
	NBT	17.2	B	210	393	33.0	C	244	467	15.3	B	162	292				
	NBR									11.3	B	35	86				
	SBL	22.8	C	25	73	22.5	C	24	56	19.8	B	21	53	5.4	A	103	284
	SBTR	16.9	B	117	210	33.4	C	141	235	16.9	B	121	203				
<b>Overall</b>	<b>21.9</b>	<b>C</b>	<b>N/A</b>	<b>N/A</b>	<b>30.9</b>	<b>C</b>	<b>N/A</b>	<b>N/A</b>	<b>21.2</b>	<b>C</b>	<b>N/A</b>	<b>N/A</b>	<b>6.0</b>				

Peak Period	Approach	Existing Conditions				Signalization Improvements				Increased NB LT Storage				Roundabout			
		Delay (s/veh)	LOS	Avg. (ft)	95th % (ft)	Delay (s/veh)	LOS	Avg. (ft)	95th % (ft)	Delay (s/veh)	LOS	Avg. (ft)	95th % (ft)	Delay (s/veh)	LOS	Avg. (ft)	95th % (ft)
PM	EBL	31.7	C	16	42	26.7	C	15	48	31.7	C	20	50	7.8	A	65	106
	EBTR	29.1	C	145	236	48.0	D	240	376	29.1	C	148	244				
	WBL	54.0	D	107	233	40.3	D	80	184	54.0	D	95	195	6.3	A	183	364
	WBT	27.0	C	215	438	37.1	D	182	290	27.0	C	173	335				
	WBR	18.5	B	99	380	23.2	C	55	167	18.5	B	59	248				
	NBL	22.0	C	46	77	21.2	C	44	75	22.0	C	53	106	9.1	A	1070	2121
	NBT	20.8	B	405	800	43.8	D	671	1348	17.0	B	181	334				
	NBR									11.7	B	40	92				
	SBL	30.9	C	48	98	26.2	C	45	104	24.5	C	43	78	6.6	A	135	258
	SBTR	14.8	B	119	193	26.6	C	163	264	14.8	B	119	192				
<b>Overall</b>	<b>24.8</b>	<b>C</b>	<b>N/A</b>	<b>N/A</b>	<b>37.3</b>	<b>D</b>	<b>N/A</b>	<b>N/A</b>	<b>23.4</b>	<b>C</b>	<b>N/A</b>	<b>N/A</b>	<b>7.5</b>	<b>A</b>	<b>N/A</b>	<b>N/A</b>	

**Table 7.6: Scenario 3 - Center St. and Seven Mile Rd. Intersection Mitigation Summary (Future)**

Peak Period	Approach	Existing Conditions				Signalization Improvements				Increased NB LT Storage				Roundabout			
		Delay (s/veh)	LOS	Avg. (ft)	95th % (ft)	Delay (s/veh)	LOS	Avg. (ft)	95th % (ft)	Delay (s/veh)	LOS	Avg. (ft)	95th % (ft)	Delay (s/veh)	LOS	Avg. (ft)	95th % (ft)
AM	EBL	21.7	C	18	42	22.2	C	19	52	21.7	C	19	49	6.0	A	58	110
	EBTR	23.5	C	107	177	32.8	C	141	229	23.5	C	110	186				
	WBL	27.4	C	15	42	23.9	C	11	30	27.4	C	18	49	4.4	A	35	69
	WBT	19.0	B	67	123	27.1	C	69	127	19.0	B	66	121				
	WBR	17.4	B	17	48	21.7	C	16	48	17.4	B	16	49				
	NBL	19.5	B	26	64	15.6	B	28	63	19.5	B	20	53	8.0	A	247	395
	NBT	19.7	B	224	393	29.6	C	264	481	17.5	B	188	323				
	NBR									11.2	B	21	68				
	SBL	30.0	C	56	133	19.4	B	32	59	26.1	C	49	104	5.2	A	75	165
	SBTR	15.3	B	118	194	20.7	C	103	174	15.3	B	111	196				
<b>Overall</b>	<b>20.0</b>	<b>B</b>	<b>N/A</b>	<b>N/A</b>	<b>26.5</b>	<b>C</b>	<b>N/A</b>	<b>N/A</b>	<b>18.9</b>	<b>B</b>	<b>N/A</b>	<b>N/A</b>	<b>6.2</b>	<b>A</b>	<b>N/A</b>	<b>N/A</b>	
PM	EBL	30.7	C	53	150	28.5	C	18	43	30.7	C	20	53	10.1	B	104	246
	EBTR	27.8	C	154	248	50.8	D	212	329	27.8	C	164	274				
	WBL	39.9	D	63	166	31.7	C	70	193	39.9	D	84	189	7.4	A	231	477
	WBT	25.6	C	257	549	39.2	D	217	344	25.6	C	175	293				
	WBR	18.7	B	158	488	25.7	C	86	222	18.7	B	51	141				
	NBL	33.9	C	39	79	26.0	C	47	72	33.9	C	87	235	12.8	B	2355	4890
	NBT	23.8	C	1622	4470	50.2	D	1351	2281	19.3	B	246	446				
	NBR									11.5	B	35	88				
	SBL	36.1	C	51	142	27.8	C	83	237	28.8	C	63	157	10.6	B	525	536
	SBTR	20.2	B	145	300	37.5	D	292	475	20.2	C	213	338				
<b>Overall</b>	<b>25.1</b>	<b>C</b>	<b>N/A</b>	<b>N/A</b>	<b>41.7</b>	<b>D</b>	<b>N/A</b>	<b>N/A</b>	<b>23.4</b>	<b>C</b>	<b>N/A</b>	<b>N/A</b>	<b>10.3</b>	<b>B</b>	<b>N/A</b>	<b>N/A</b>	


## 8 CONCLUSIONS

The study includes the evaluation of three (3) scenarios which are summarized below



### Scenario 1 Baseline Operations (Pre-COVID)

- Pre-COVID 2018 traffic volumes grown to 2021
- Pre-COVID traffic operations



### Scenario 2 Main St. & Center St. Closed

- 2021 Existing Traffic Volumes Collected
- COVID Impacts and Road Closures



### Scenario 3 Main St. Closed Only

- 2021 Existing Traffic Volumes, adjusted to account for Center Street open
- COVID Impacts and Road Closure

- All of the study intersections generally operate well with all Scenarios, with a few exceptions as noted below.
- The recommended improvements identified for existing and background conditions were found to mitigate the future intersection delays at the study intersections with the additional of the site generated traffic volumes.
- The additional delays noted for Background conditions are highlighted in green and additional delays from Future conditions are highlighted below in blue. No mitigation measures are recommended.
- No additional mitigation measures were identified with the additional site generated traffic in the Future conditions.
- The mitigations are generally the same across all evaluation scenarios. The operations and recommendations are summarized in **Table 8.1** and shown on **Figure 9**

**Table 8.1: Analysis and Mitigation Summary**

Intersection		Scenario #1 (Pre-COVID)	Scenario #2 (Both Closed)	Scenario #3 (Main Closed)
2	Randolph Street & Center Street	<b>Signal Recommended</b> Delays for EB and WB Stop control approaches.	<b>All Way Stop Control Recommended</b> Delays for EB and WB Stop control approaches.	<b>Signal Recommended</b> Delays for EB and WB Stop control approaches.
8	Main Street & Hutton Street	<b>Signal Timing Optimization Recommended</b>	n/a	
9	Main Street & Griswold Street	<b>Signal Timing Optimization Recommended</b>		
12	Cady Street & Center Street	<b>Signal Recommended</b> Delays for EB and WB Stop control approaches.	<b>All Way Stop Control Recommended</b> Delays for EB and WB Stop control approaches.	<b>Signal Recommended</b> Delays for EB and WB Stop control approaches.
21	Fairbrook Street & Center Street	<i>A review of network simulations indicates acceptable operations. Queue lengths were minimal and vehicles were able to find gaps in traffic.</i>	n/a	<i>A review of network simulations indicates acceptable operations. Queue lengths were minimal and vehicles were able to find gaps in traffic.</i>
22	Seven Mile Road & Wing Street / St. Lawrence	<i>A review of network simulations indicates acceptable operations. Queue lengths were minimal and vehicles were able to find gaps in traffic.</i>		n/a
23	Seven Mile Road & Sheldon Avenue / Center Street	<b>Option 2:</b> Widen the bridge/culvert across the Johnson Creek to provide a NB left-turn lane with 500- ft of storage length. <b>is recommended.</b>	n/a	<b>Option 2:</b> Widen the bridge/culvert across the Johnson Creek to provide a NB left-turn lane with 500- ft of storage length. <b>is recommended.</b>
24	Seven Mile Road & Hines Drive	<i>Delays on the NB approach are due to impacts/queue lengths extending from Seven Mile Road &amp; Sheldon Avenue / Center Street intersection.</i>	n/a	<i>Delays on the WB and NB approach are due to impacts/queue lengths extending from Seven Mile Road &amp; Sheldon Avenue / Center Street intersection.</i>
26/ 27	Northville Road & N. Seven Mile Road	<b>Signal Recommended</b> Delays for WB Stop control approach, northbound left-turn sight distance limitations.		
28	Northville Road & S. Seven Mile Road	<b>Signal Timing Optimization Recommended</b>		
32	Center Street & Proposed Beal Street	<i>A review of network simulations indicates acceptable operations. Queue lengths were minimal and vehicles were able to find gaps in traffic.</i>	n/a	n/a



## 9 RECOMMENDATIONS

The results of the traffic study showed that **Scenario 2: Main St. & Center St. Closed** is the preferred roadway operations. The closures have reduced the volume of through traffic in the City of Northville generated from adjacent communities. However, the rerouting of traffic has impacted several intersections, therefore mitigation measures are recommended to accommodate those traffic volumes. The recommended mitigation measures below will improve the existing operations with Scenario 2 and will accommodate the additional site generated traffic volumes at site buildout in 2028. The results of the traffic improvements for Scenario 2 are summarized below.

Scenario 2: Main St. & Center St. Closed				
<b>Randolph Street &amp; Center Street</b> <ul style="list-style-type: none"> <li>All Way Stop</li> </ul>	<b>Main Street &amp; Griswold Street</b> <ul style="list-style-type: none"> <li>Signal Timing Optimization</li> </ul>	<b>Cady Street &amp; Center Street</b> <ul style="list-style-type: none"> <li>All Way Stop</li> </ul>	<b>Northville Road &amp; N. Seven Mile Road</b> <ul style="list-style-type: none"> <li>New Traffic Signal</li> </ul>	<b>Northville Road &amp; S. Seven Mile Road</b> <ul style="list-style-type: none"> <li>Signal Timing Optimization</li> </ul>

**FIGURE 9: INTERSECTION MITIGATION SUMMARY**

